


100
ATLAS 1919 - 2019

ATLAS
SINCE 1919

 37,699 – 42,108 lbs

 112 HP

EU Stage V

 27' 7"

**ROBUST.
PRECISE.
EFFICIENT.**



**MATERIAL HANDLING MACHINE
160MH**

WWW.ATLASGMBH.COM

ATLAS – CONSTRUCTION MACHINERY MANUFACTURER WITH TRADITION

From person to person

When Hinrich Weyhausen started selling construction and agricultural machinery in 1919, he discovered that the machines which his customers actually needed were not available. So he listened to them carefully and went about building the machines himself – exactly according to the requirements of the people who used his machines every day. He carried out pioneering work with a passion under the brand name of Atlas. His focus was always on the benefit of the machines. And nothing has changed for us in terms of this ideal today.



**Atlas will make you strong
with excellent products and
a comprehensive service.**



With highly motivated employees, a great deal of commitment and expertise ATLAS GmbH develops successful crane & excavator technologies. Numerous customers, engineers and experts all around the globe have made their contribution. The result is robust equipment to enable you to work more effectively and safely than ever before.

As our know-how grew, so too did our dealer and service network worldwide.

We can hence guarantee – in those days and today too – that we will always be on the spot when you need us.



Atlas manufactures a wide range of equipment for the construction, railroad, material handling and infrastructure industries. You will find more information on Atlas under www.atlasgmbh.com.

CONSTRUCTION



TRANSPORT



INFRASTRUCTURE



RECYCLING



CUSTOMER SATISFACTION IS OUR PRIORITY!

WE ARE COMMITTED

to providing our customers with highest quality products and services.

QUALITY STANDARDS AND CUSTOMER SATISFACTION

are measured in terms of service performance, reliability, relevance and timeliness.

OUR COMPANY'S MISSION, GOALS AND OBJECTIVES

are directed towards ongoing process improvement as a basis for strengthening our competitive position and for improving product quality and service standards.

QUALITY STANDARDS AND CUSTOMER SATISFACTION

are measured in terms of product performance and reliability.

PRODUCT RANGE

160MH





**EXTENSIVE DEALER NETWORK
EXCELLENT SERVICE
CUSTOMER FOCUSED**

ATLAS - The new excavator cabin



The new ATLAS cabin – Best climate, sharp display, digital and direct, more space, best view, extremely quiet, feel good

Clear control panel – Direct selection via keys or digital control via button.....



Move safely: Standard lateral- and rear view cameras



Most powerful air conditioning system - short airways - large lines - cross sections - silent



Best view – especially to the right



ATLAS SINCE 1939 - The new excavator cabin

Stay communicated - radio with USB connection - mobile phone tray by the left joystick



Easy: Upper carriage lock at the push of a button on T



Bottle holder near the driver



Lunch break - space for cool box with electrical connection - behind the driver's seat



Floor non-slip and Easy to sweep - storage space for tools and materials



TECHNICAL SPECIFICATION 160MH

ENGINE

Power rating..... 112 HP	Bore / cylinder stroke 101 / 126	STANDARD BASIC EQUIPMENT:
RPM 1800 rpm	Cooling system Water-cooled	• Automatic idling system / Engine stop
Model..... Deutz TCD 4.1 L4 EU Stage V	Air filter..... Dry air filter	• Cold start assistance
Design..... Turbocharger	Battery 2 x 12 V / 100 Ah	• Diesel pre-filter
Cylinder capacity 246 in ³	Generator 24 V / 100 A	• Engine monitoring
Number of cylinders 4	Starter..... 24 V / 4 kW	

HYDRAULIC SYSTEM

• AWE 5 system (Load sensing)	• Pipe break protection valves for lifting and articulated cylinders	• Operating modes:
• Load limit controlled high-performance pump	• Proportional grab and grab rotating function	F1 (Fine)
• Fuel-efficient flow-on-demand control	• 3 circuits for additional consumer loads possible	F2 (Eco)
• Sensitive, proportional, independent control	• Max. oil flow 49.7 gpm	F3 (Power)
• Primary and secondary protection against overload	• Max. operating pressure 4,641 PSI	• Accumulator for emergency lowering of the arm system
• Suction valves for all work functions	• Cylinder end position damping	• Load-limit control

SWING ASSEMBLY

• Axial piston motor with priority valve	• Automatically controlled multi-disc brake	• Swing torque 25,593 lbf-ft
• Planetary transmission	• Two, two-stage valves	• Max. swing speed. 9 rpm

TRACTION DRIVE AND BRAKES

• Variable displacement motor	• Automotive traveling and cruise control:	• Tractive force..... 17,085 lbf
• Power-shift transmission	• Max. speed 12.4 mph	• Gradeability 60 %
• Double-acting brake valve	• Off-road speed 3.1 mph	• Dual-circuit brake system Multi-disc
• Travel direction pre-selection via switch in joystick	• Crawling speed..... 0.6 mph	• Parking brake Multi-disc

UNDERCARRIAGE

• Steering axle with automatic oscillating axle locking	• Heavy duty axles	• STD tires: Mitas 10.00-20 16PR EM23
• Additional axis locking via left joystick	• Toolbox in undercarriage	

TIRES

OPTIONAL:

• 4-road tyres 600/40 – 22.5 14PR Mitas	• 8-road tyres 10.00-20 16PR Nokia	• 8-road tyres 315/70 R22.5 Marked with a band, Grader type
• 4-road tyres 600/40 – 22.5 18PR Alliance	• 8-road tyres 10.00-20 16PR profile for asphalt use	• 8-road tyres 215/70 R22.5 Caliber Power Grip 23
• 4-road tyres 710/40 – 22.5 24PR Nokia	• 8-road tyres 10.00-20 Super elastic (up to 16 km/h)	

WORKING EQUIPMENT 160MH

DRIVER'S CAB

<ul style="list-style-type: none"> • Meets latest safety standards (ROPS) • Extra large entry zone • Spacious leg room • Radio preparation with mute function • Ready for electric cooling box • Different options for storage, compartment for documents • Heat-absorbing glass, tinted windows • Excellent all-way visibility • Bottle holder 	DRIVER'S SEAT: <ul style="list-style-type: none"> • Comfort seat with headrest • Arm rests and lumbar support • Seat adjustable separately from console • Air suspension • Heated • Horizontal and vertical suspension • Lumbar support 	MONITORING: <ul style="list-style-type: none"> • Operating data display screen • Automatic system for monitoring, warning and storage of data • Rear view security camera • Right side camera
	CONTROL: <ul style="list-style-type: none"> • Ergonomic joysticks with proportional slide control • Slim steering column, height and tilt adjustable • Indicators, controls and operating switches are clearly arranged • Swing axle lock in the left joystick 	CLIMATE CONTROL: <ul style="list-style-type: none"> • Automatic climate control • Excellent air distribution through optimally arranged nozzles • Refrigerant R134a
		SOUND LEVELS: <ul style="list-style-type: none"> • ISO 6396 (L_pA) in driver's cab 70 dB(A) • 2000/14 EG (L_wA) ambience level 95 dB(A)

ADDITIONAL EQUIPMENT

<ul style="list-style-type: none"> • Refueling pump • Beacon light • Gear protection • Cabin Sliding door • Cab protection guard • Cab elevation • Joystick steering • 270° camera system 	<ul style="list-style-type: none"> • LED working lights • Alarm-signal while driving • Auxiliary heating with water circuit • Automatic working brake • Switch hydraulic attachment kit, supports separately at front and rear • Hydraulic add-on kit, switch supports axially separately • Proportional control of supports by slide in joystick • Automatically controlled and monitored electric central lubrication system for uppercarriage and arm equipment 	<ul style="list-style-type: none"> • Premium Driver seat (Actimo Evolution) • Electric cooling box • Radio with USB • GPS/GSM telemetric system for monitoring of operating data, consumption, position • Biodegradable oil • Wide axles (overall width 9') • Support shield (overall width 9')
		Other additional equipment: See price list Special options: upon request

FILL CAPACITIES

• Fuel tank 63.4 gal	• Engine oil 2.6 gal	• Hydraulic system 52.8 gal
• Cooling system 10 gal	• Hydraulic tank 41.5 gal	• Ad Blue® 5.3 gal

OPERATING WEIGHTS

	MONOBLOCK BOOM 15' 9" (C3.4MGG)		ADJUSTABLE BOOM Base arm 6' 5" (C3.41) Boom 11' 5" (C346.1)	
	Stick 8' 2" (D33)	Stick 9' 10" (D331)	Stick 8' 2" (D33)	Stick 9' 10" (D331)
Support dozer blade	37,699 - 38,801 lbs	37,920 - 39,022 lbs	38,801 - 39,904 lbs	39,022 - 40,124 lbs
SDB / outriggers	39,242 - 40,344 lbs	39,463 - 40,565 lbs	40,345 - 41,447 lbs	40,565 - 41,447 lbs
4 support outriggers	39,683 - 40,786 lbs	39,904 - 41,006 lbs	40,786 - 41,888 lbs	41,006 - 42,108 lbs


Operating weight incl. driver, fuel, lubricants and coolant plus 2205 lbs for attachments

ATTACHMENTS

• Clamshell grab	• Load hook	• Log grab
• Orange peel grab	• Load lifting magnet	• Sorting grab





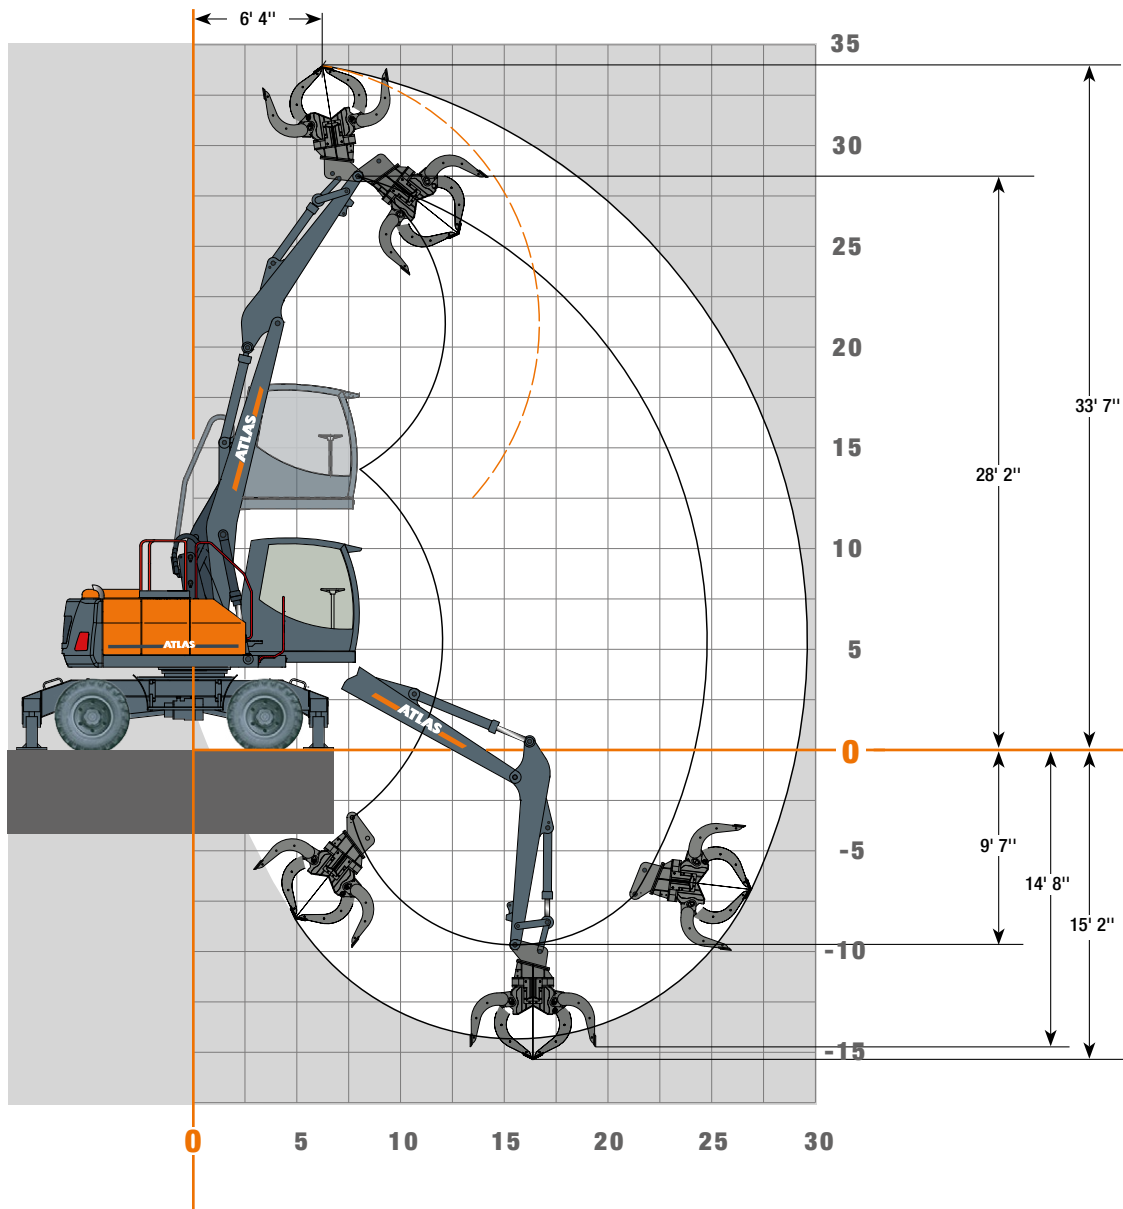















WORKING RANGES 160MH

Monoblock boom 15' 9" (C3.4MGG) and stick 8' 2" (D33)



LIFTING CAPACITIES 160MH

Monoblock boom 15' 9" (C3.4MGG) and stick 8' 2" (D33)

HEIGHT	Undercarriage position		8' 2"	9' 10"	11' 6"	13' 1"	14' 9"	16' 5"	18' 1"	19' 8"	21' 4"	23'	24' 7"
26' 3"	FRONT 	outriggers down			10 798								
		outriggers up			10 798								
	LATERAL 	outriggers down				10 798							
		outriggers up				10 798							
23'	FRONT 	outriggers down				9 874	9 288	8 854					
		outriggers up				9 874	9 288	8 854					
	LATERAL 	outriggers down				9 874	9 288	8 854					
		outriggers up				9 874	8 757*	7 432*					
19' 8"	FRONT 	outriggers down				9 385	9 087	8 556	8 111	7 745			
		outriggers up				9 385	9 087	8 556	8 111	7 745			
	LATERAL 	outriggers down				9 385	9 087	8 556	8 111	7 745			
		outriggers up				9 385	8 805*	7 522*	6 515*	5 686*			
16' 5"	FRONT 	outriggers down			8 642	9 264	9 341	8 693	8 146	7 672	7 251		
		outriggers up			8 642	9 264	9 341	8 693	8 146	7 672	7 251		
	LATERAL 	outriggers down			8 642	9 264	9 341	8 693	8 146	7 672	7 251		
		outriggers up			8 642	9 264	8 702*	7 458*	6 488*	5 706*	5 051*		
13' 1"	FRONT 	outriggers down		10 203	10 747	10 952	9 903	9 065	8 377	7 793	7 277	6 788	
		outriggers up		10 203	10 747	10 952	9 903	9 065	8 377	7 793	7 277	6 788	
	LATERAL 	outriggers down		10 203	10 747	10 952	9 903	9 065	8 377	7 793	7 277	6 788	
		outriggers up		10 203	10 747	10 055*	8 483*	7 299*	6 376*	5 633*	5 018*	4 495*	
9' 10"	FRONT 	outriggers down			13 840	11 956	10 575	9 515	8 666	7 959	7 346	6 777	6 105
		outriggers up			13 840	11 956	10 575	9 515	8 666	7 959	7 346	6 777	6 105
	LATERAL 	outriggers down			13 840	11 956	10 575	9 515	8 666	7 959	7 346	6 777	6 105
		outriggers up			11 627*	9 634*	8 186*	7 083*	6 217*	5 516*	4 938*	4 451*	4 030*
6' 7"	FRONT 	outriggers down				12 635	11 045	9 821	8 847	8 038	7 337	6 693	5 997
		outriggers up				12 635	11 045	9 821	8 847	8 038	7 337	6 693	5 997
	LATERAL 	outriggers down				12 635	11 045	9 821	8 847	8 038	7 337	6 693	5 997
		outriggers up				9 204*	7 875*	6 854*	6 045*	5 388*	4 846*	4 389*	4 004*
3' 3"	FRONT 	outriggers down				12 513	10 994	9 766	8 757	7 901	7 145	6 424	5 600
		outriggers up				12 513	10 994	9 766	8 757	7 901	7 145	6 424	5 600
	LATERAL 	outriggers down				12 513	10 994	9 766	8 757	7 901	7 145	6 424	5 600
		outriggers up				8 909*	7 639*	6 671*	5 904*	5 284*	4 771*	4 341*	3 977*
0	FRONT 	outriggers down				11 270	11 545	10 311	9 222	8 272	7 427	6 638	5 831
		outriggers up				11 270	11 545	10 311	9 222	8 272	7 427	6 638	5 831
	LATERAL 	outriggers down				11 270	11 545	10 311	9 222	8 272	7 427	6 638	5 831
		outriggers up				10 553*	8 788*	7 524*	6 570*	5 822*	5 220*	4 724*	4 314*
-4' 11"	FRONT 	outriggers down		9 722	9 445	8 834	8 102	7 339	6 572	5 785	4 894		
		outriggers up		9 722	9 445	8 834	8 102	7 339	6 572	5 785	4 894		
	LATERAL 	outriggers down		9 722	9 445	8 834	8 102	7 339	6 572	5 785	4 894		
		outriggers up		9 722	9 445	8 803*	7 513*	6 552*	5 809*	5 216*	4 740*		


The specified max. loading capacities in pounds (lbs) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values.

*Value limited due to excavator stability.

All loading capacities are listed with 8' 2" undercarriage width. The undercarriage may be delivered with 9' width as an option.





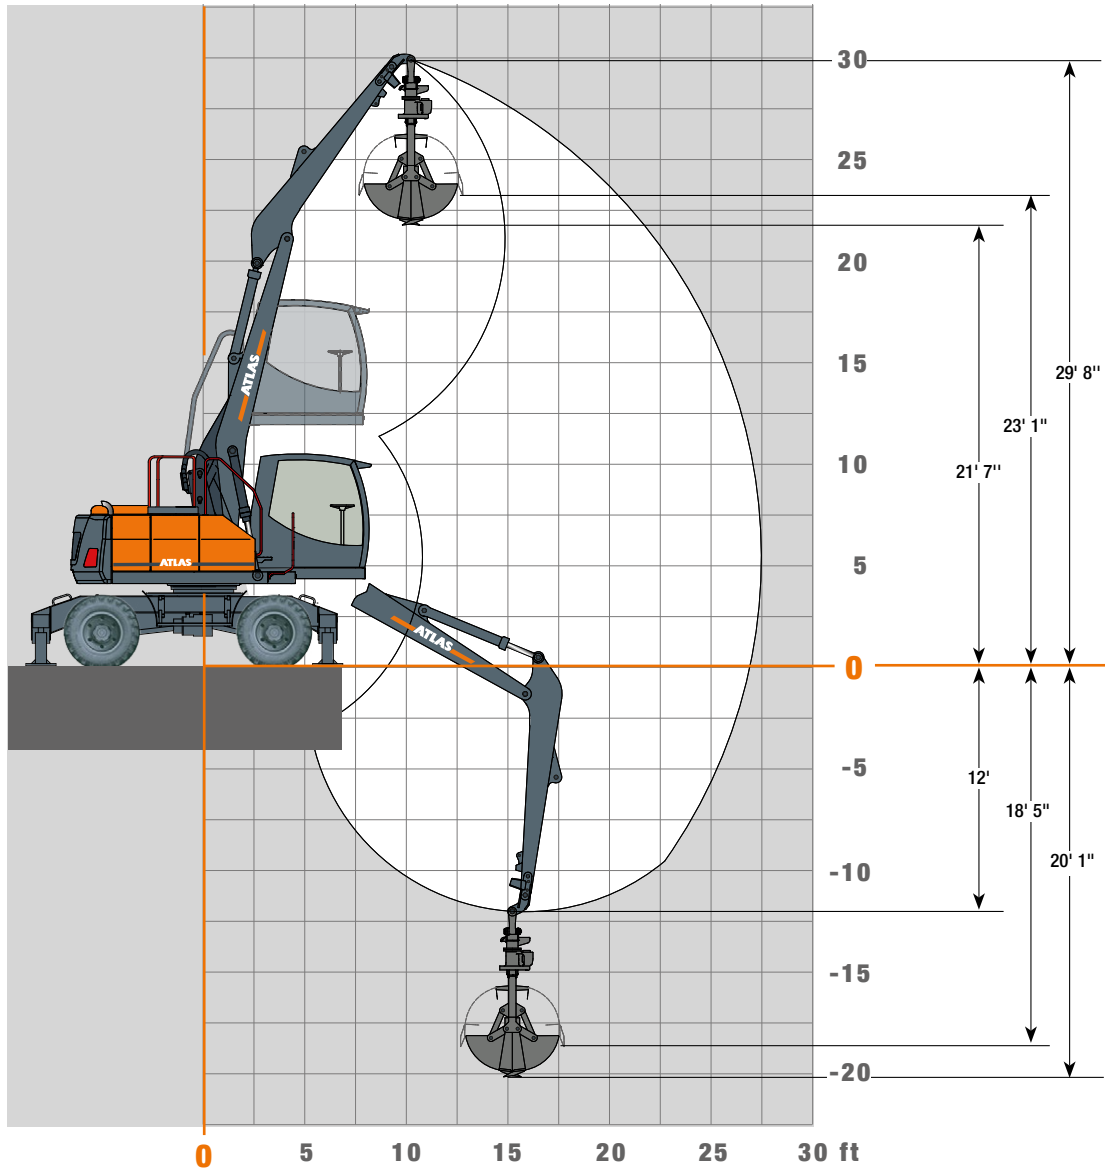















WORKING RANGES 160MH

Monoblock boom 15' 9" (C3.4MGG) and stick 9' 10" (D331)



LIFTING CAPACITIES 160MH

Monoblock boom 15' 9" (C3.4MGG) and stick 9' 10" (D331)

HEIGHT	Undercarriage position		9' 10"	11' 6"	13' 1"	14' 9"	16' 5"	18' 1"	19' 8"	21' 4"	23'	24' 7"	26' 3"
26' 3"	FRONT 	outriggers down			8 856	7 815							
		outriggers up			8 856	7 815							
	LATERAL 	outriggers down			8 856	7 815							
		outriggers up			8 856	7 815							
23'	FRONT 	outriggers down				8 236	8 124	7 513					
		outriggers up				8 236	8 124	7 513					
	LATERAL 	outriggers down				8 236	8 124	7 513					
		outriggers up				8 236	7 597*	6 545*					
19' 8"	FRONT 	outriggers down				7 687	7 926	7 604	7 269	6 678			
		outriggers up				7 687	7 926	7 604	7 269	6 678			
	LATERAL 	outriggers down				7 687	7 926	7 604	7 269	6 678			
		outriggers up				7 687	7 632*	6 609*	5 783*	5 088*			
16' 5"	FRONT 	outriggers down			7 094	7 564	7 928	7 703	7 293	6 922	6 581		
		outriggers up			7 094	7 564	7 928	7 703	7 293	6 922	6 581		
	LATERAL 	outriggers down			7 094	7 564	7 928	7 703	7 293	6 922	6 581		
		outriggers up			7 094	7 564	7 551*	6 556*	5 758*	5 101*	4 544*		
13' 1"	FRONT 	outriggers down			7 348	7 959	8 411	8 591	7 989	7 471	7 017	6 601	6 186
		outriggers up			7 348	7 959	8 411	8 591	7 989	7 471	7 017	6 601	6 186
	LATERAL 	outriggers down			7 348	7 959	8 411	8 591	7 989	7 471	7 017	6 601	6 186
		outriggers up			7 348	7 959	8 411	7 379*	6 429*	5 668*	5 042*	4 515*	4 061*
9' 10"	FRONT 	outriggers down			12 932	11 294	10 073	9 120	8 351	7 707	7 154	6 656	6 175
		outriggers up			12 932	11 294	10 073	9 120	8 351	7 707	7 154	6 656	6 175
	LATERAL 	outriggers down			12 932	11 294	10 073	9 120	8 351	7 707	7 154	6 656	6 175
		outriggers up			11 878*	9 788*	8 280*	7 141*	6 250*	5 531*	4 943*	4 447*	4 021*
6' 7"	FRONT 	outriggers down			12 233	11 233	10 721	9 566	8 646	7 886	7 238	6 658	6 109
		outriggers up			12 233	11 233	10 721	9 566	8 646	7 886	7 238	6 658	6 109
	LATERAL 	outriggers down			12 233	11 233	10 721	9 566	8 646	7 886	7 238	6 658	6 109
		outriggers up			9 301*	7 928*	6 881*	6 052*	5 381*	4 828*	4 361*	3 966*	3 627*
3' 3"	FRONT 	outriggers down			12 520	11 944	10 944	9 709	8 713	7 881	7 169	6 526	5 897
		outriggers up			12 520	11 944	10 944	9 709	8 713	7 881	7 169	6 526	5 897
	LATERAL 	outriggers down			12 520	11 944	10 944	9 709	8 713	7 881	7 169	6 526	5 897
		outriggers up			8 907*	7 628*	6 649*	5 873*	5 243*	4 722*	4 288*	3 918*	3 602*
0	FRONT 	outriggers down			12 562	11 984	10 575	9 411	8 433	7 595	6 847	6 149	5 421
		outriggers up			12 562	11 984	10 575	9 411	8 433	7 595	6 847	6 149	5 421
	LATERAL 	outriggers down			12 562	11 984	10 575	9 411	8 433	7 595	6 847	6 149	5 421
		outriggers up			10 432*	8 697*	7 447*	6 499*	5 754*	5 150*	4 654*	4 237*	3 887*
-4' 11"	FRONT 	outriggers down	11 768	10 814	9 808	8 849	7 961	7 141	6 369	5 606	4 771		
		outriggers up	11 768	10 814	9 808	8 849	7 961	7 141	6 369	5 606	4 771		
	LATERAL 	outriggers down	11 768	10 814	9 808	8 849	7 961	7 141	6 369	5 606	4 771		
		outriggers up	11 768	10 404*	8 633*	7 372*	6 426*	5 692*	5 104*	4 625*	4 233*		


The specified max. loading capacities in pounds (lbs) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values.

*Value limited due to excavator stability.

All loading capacities are listed with 8' 2" undercarriage width. The undercarriage may be delivered with 9' width as an option.





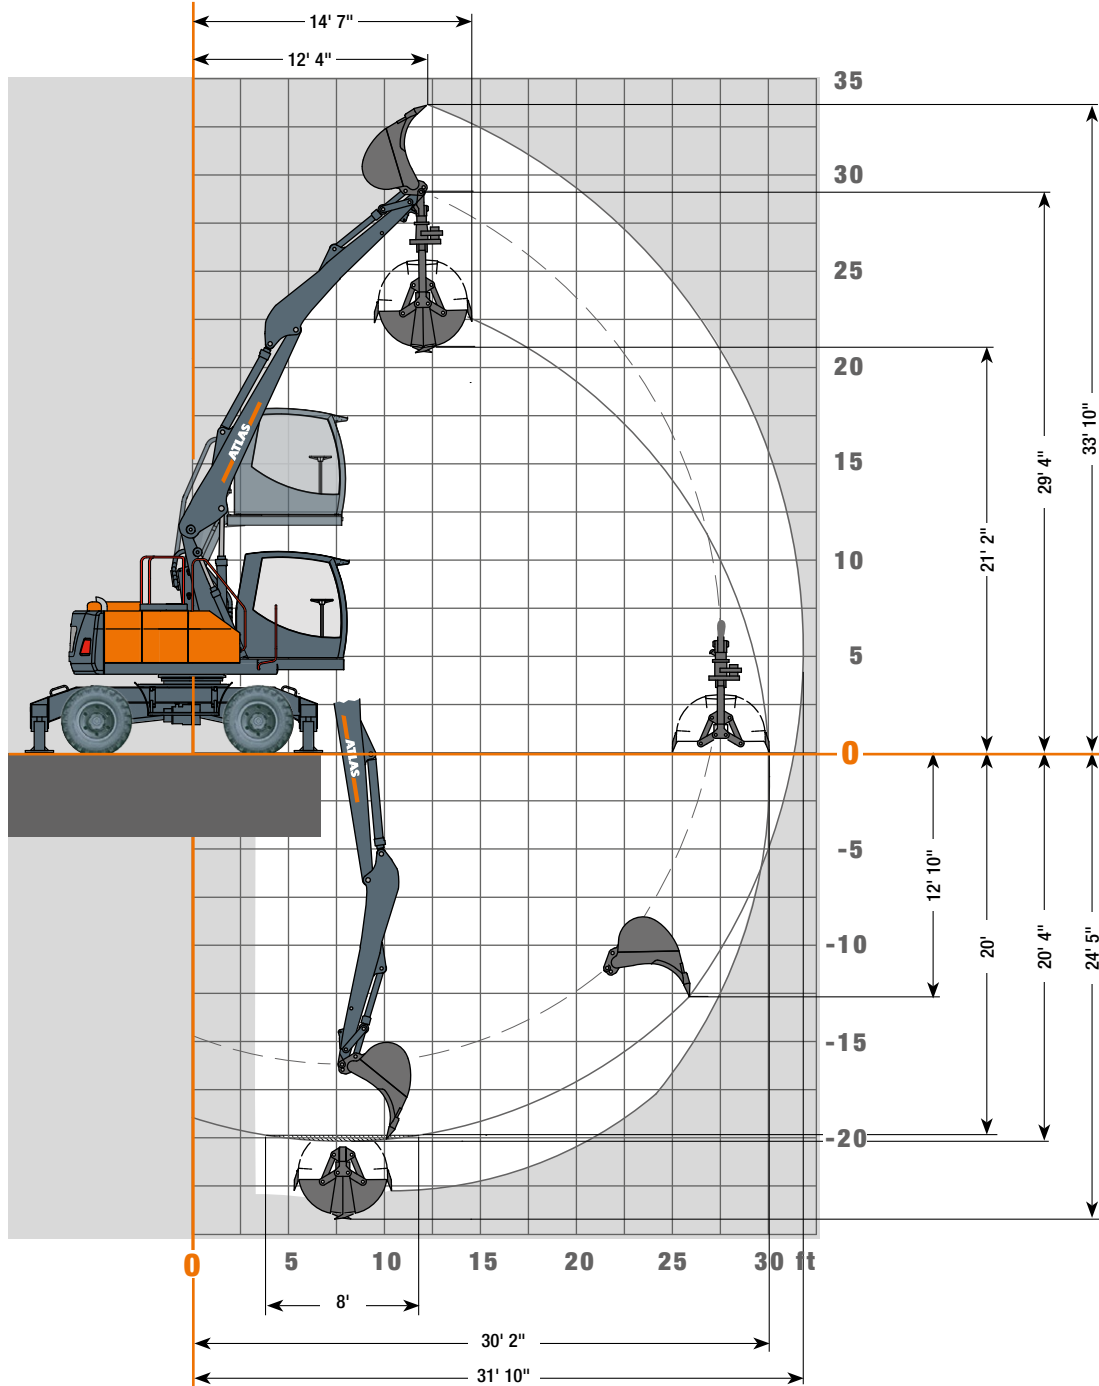













WORKING RANGES 160MH

Adjustable boom: Base arm 6' 5" (C3.41) and boom 11' 5" (C346.1) and stick 9' 10" (D331)



LIFTING CAPACITIES 160MH

Adjustable boom: Base arm 6' 5" (C3.41) and boom 11' 5" (C346.1) and stick 9' 10" (D331). Max reach 31' 10"

HEIGHT	Undercarriage position		8' 2"	9' 10"	11' 6"	13' 1"	14' 9"	16' 5"	18' 1"	19' 8"	21' 4"	23'	24' 7"	26' 3"
16' 5"	FRONT 	outriggers down					6 956	6 583	6 265	5 997	5 767	5 575	5 421	
		outriggers up					6 956	6 583	6 265	5 997	5 767	5 575	5 421	
	LATERAL 	outriggers down					6 956	6 583	6 265	5 997	5 767	5 575	5 421	
		outriggers up					6 956	6 583	6 265	5 809*	5 187*	4 619*	4 048*	
13' 1"	FRONT 	outriggers down			9 339	8 408	7 694	7 127	6 669	6 288	5 968	5 694	5 459	5 073
		outriggers up			9 339	8 408	7 694	7 127	6 669	6 288	5 968	5 694	5 459	5 073
	LATERAL 	outriggers down			9 339	8 408	7 694	7 127	6 669	6 288	5 968	5 694	5 459	5 073
		outriggers up			9 339	8 408	7 694	7 127	6 446*	5 728*	5 135*	4 641*	4 081*	3 593*
9' 10"	FRONT 	outriggers down		11 645	11 204	9 702	8 624	7 811	7 174	6 660	6 237	5 880	5 569	5 289
		outriggers up		11 645	11 204	9 702	8 624	7 811	7 174	6 660	6 237	5 880	5 569	5 289
	LATERAL 	outriggers down		11 645	11 204	9 702	8 624	7 811	7 174	6 660	6 237	5 880	5 569	5 289
		outriggers up		11 645	11 204	9 641*	8 234*	7 165	6 323*	5 639*	5 082*	4 621*	4 070*	3 591*
6' 7"	FRONT 	outriggers down	13 373	13 276	12 469	10 904	9 504	8 463	7 663	7 024	6 501	6 063	5 679	5 331
		outriggers up	13 373	13 276	12 469	10 904	9 504	8 463	7 663	7 024	6 501	6 063	5 679	5 331
	LATERAL 	outriggers down	13 373	13 276	12 469	10 904	9 504	8 463	7 663	7 024	6 501	6 063	5 679	5 331
		outriggers up	13 373	13 276	11 221*	9 398*	8 056*	7 035*	6 226*	5 578*	5 049*	4 566*	4 015*	3 549*
3' 3"	FRONT 	outriggers down	15 170	14 464	13 309	11 576	10 062	8 909	8 005	7 280	6 682	6 175	5 728	5 346
		outriggers up	15 170	14 464	13 309	11 576	10 062	8 909	8 005	7 280	6 682	6 175	5 728	5 346
	LATERAL 	outriggers down	15 170	14 464	13 309	11 576	10 062	8 909	8 005	7 280	6 682	6 175	5 728	5 346
		outriggers up	15 170	13 741*	11 083*	9 277*	7 954*	6 964*	6 182*	5 560*	5 079*	4 455*	3 926*	3 483*
0	FRONT 	outriggers down	17 282	15 650	13 640	11 660	10 179	9 026	8 104	7 348	6 717	6 191	5 774	5 282
		outriggers up	17 282	15 650	13 640	11 660	10 179	9 026	8 104	7 348	6 717	6 191	5 774	5 282
	LATERAL 	outriggers down	17 282	15 650	13 640	11 660	10 179	9 026	8 104	7 348	6 717	6 191	5 774	5 282
		outriggers up	17 282	13 788*	11 098*	9 275*	7 961*	6 978*	6 217*	5 578*	4 923*	4 317*	3 821*	3 411*
-3' 3"	FRONT 	outriggers down	19 742	16 605	13 768	11 746	10 240	9 074	8 146	7 396	6 786	6 321	5 692	4 680
		outriggers up	19 742	16 605	13 768	11 746	10 240	9 074	8 146	7 396	6 786	6 321	5 692	4 680
	LATERAL 	outriggers down	19 742	16 605	13 768	11 746	10 240	9 074	8 146	7 396	6 786	6 321	5 692	4 680
		outriggers up	18 428*	13 977*	11 241*	9 356*	7 987*	6 940*	6 111*	5 408*	4 729*	4 171*	3 721*	3 355*
-6' 7"	FRONT 	outriggers down	21 230	16 896	14 006	11 949	10 419	9 244	8 333	7 650	6 883	5 963	4 700	
		outriggers up	21 230	16 896	14 006	11 949	10 419	9 244	8 333	7 650	6 883	5 963	4 700	
	LATERAL 	outriggers down	21 230	16 896	14 006	11 949	10 419	9 244	8 333	7 650	6 883	5 963	4 700	
		outriggers up	18 261*	13 732*	10 988*	9 140*	7 804*	6 795*	5 933*	5 172*	4 559*	4 065*	3 662*	
-9' 10"	FRONT 	outriggers down	21 854	17 427	14 491	12 438	10 906	9 535	8 292	7 064	5 710			
		outriggers up	21 854	17 427	14 491	12 438	10 906	9 535	8 292	7 064	5 710			
	LATERAL 	outriggers down	21 854	17 427	14 491	12 438	10 906	9 535	8 292	7 064	5 710			
		outriggers up	18 203*	13 653*	10 908*	9 070*	7 712*	6 574*	5 710*	5 024*	4 473*			



The specified max. loading capacities in pounds (lbs) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values.

*Value limited due to excavator stability.

All loading capacities are listed with 8' 2" undercarriage width. The undercarriage may be delivered with 9' width as an option.

DIMENSIONS 160MH


160MH Transport position

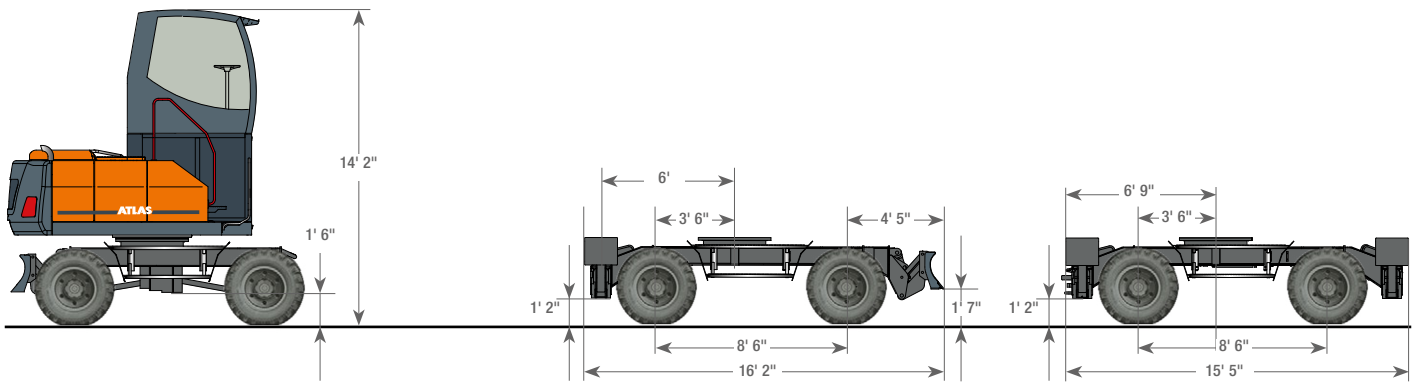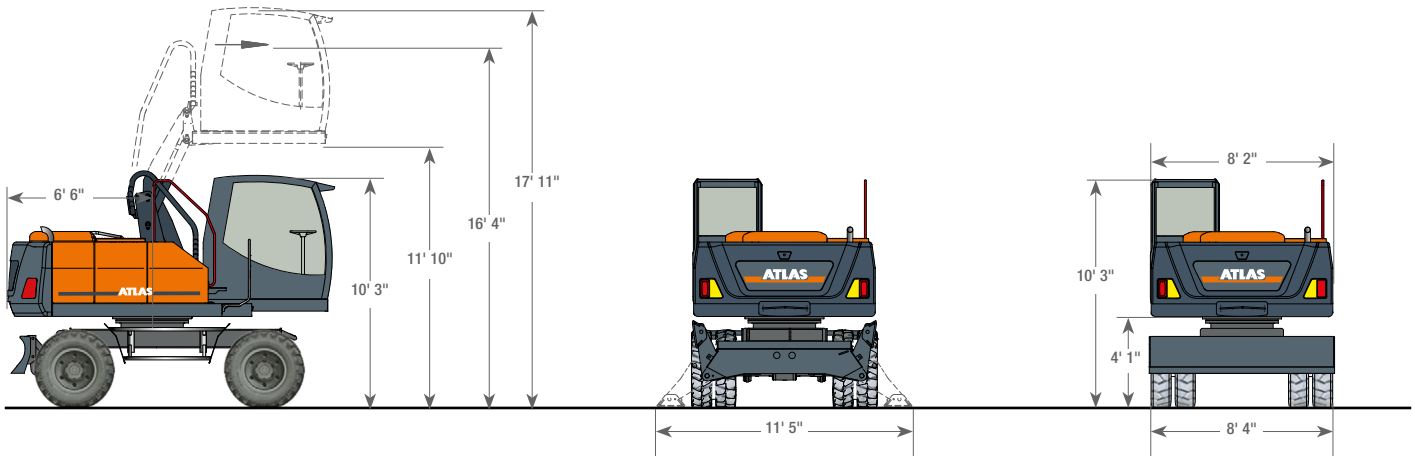


Undercarriage with combination support
(support dozer blade and two outriggers)

Undercarriage with 4 outriggers

A4.2, C3.4MGG, D33, F31

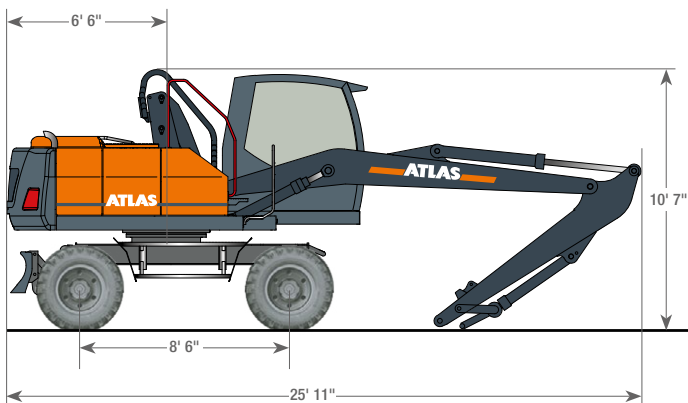

A4.2, C3.4MGG, D331, F31

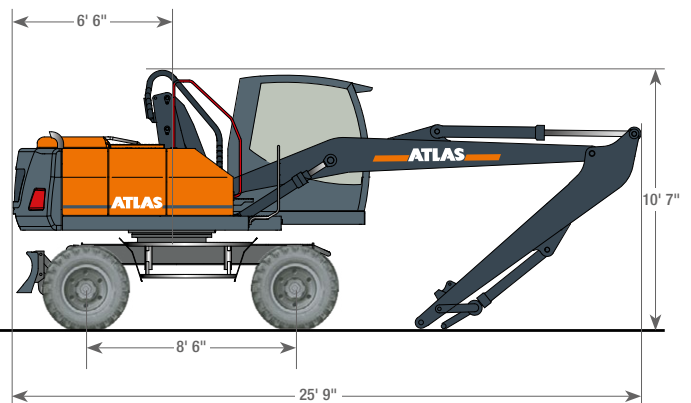



160MH-US (1) Effective date: 03/2023. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Atlas makes no other warranty, express or implied. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Atlas makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Atlas GmbH and/or its subsidiaries. All rights are reserved. Atlas® is a registered trademark of Atlas GmbH. Copyright © 2023 Atlas GmbH. Ref. no. 0000000

GANDERKESEE FACTORY

Atlas GmbH
Atlasstraße 6
D-27777 Ganderkesee,
Germany

Tel.: +49 (0) 4222 954 0
Fax: +49 (0) 4222 954 220
E-mail: info@atlasgmbh.com
www.atlasgmbh.com



VECHTA FACTORY

Atlas GmbH
Theodor-Heuss-Str. 3
D-49377 Vechta
Germany

T: +49 (0) 4441 954 0
F: +49 (0) 4441 954 299
E-mail: info@atlasgmbh.com
www.atlasgmbh.com



DELMENHORST FACTORY

Atlas GmbH
Stedinger Straße 324
D-27751 Delmenhorst
Germany

T: +49 (0) 4221 49 10
F: +49 (0) 4221 49 14 43
E-mail: info@atlasgmbh.com
www.atlasgmbh.com

ATLAS CRANES UK LTD NATIONAL SALES & SERVICE FACILITY

Wharfedale Road,
Euroway Trading Est.
Bradford, England BD4 6SL
United Kingdom

T: +44 8444 99 66 88
F: +44 1274 65 37 85
E-mail: atlasuk@atlasgmbh.com
www.atlas-cranes.co.uk
www.atlasgmbh.com



SINCE 1919
ATLAS

