

100
ATLAS 1919 - 2019

ATLAS
SINCE 1919

**STABLE.
STRONG.
STEADY.**

-  44,533 - 47,400 lbs
-  143 HP
EU Stage V
-  33' 2" - 38' 1"




**MATERIAL HANDLING
MACHINE 200MH**

WWW.ATLASGMBH.COM


ATLAS – CONSTRUCTION MACHINERY MANUFACTURER WITH TRADITION

From person to person

When Hinrich Weyhausen started selling construction and agricultural machinery in 1919, he discovered that the machines which his customers actually needed were not available. So he listened to them carefully and went about building the machines himself – exactly according to the requirements of the people who used his machines every day. He carried out pioneering work with a passion under the brand name of Atlas. His focus was always on the benefit of the machines. And nothing has changed for us in terms of this ideal today.

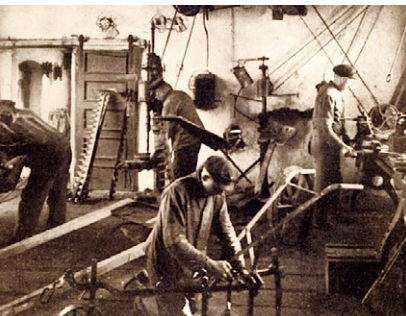

**Atlas will make you strong
with excellent products and
a comprehensive service.**

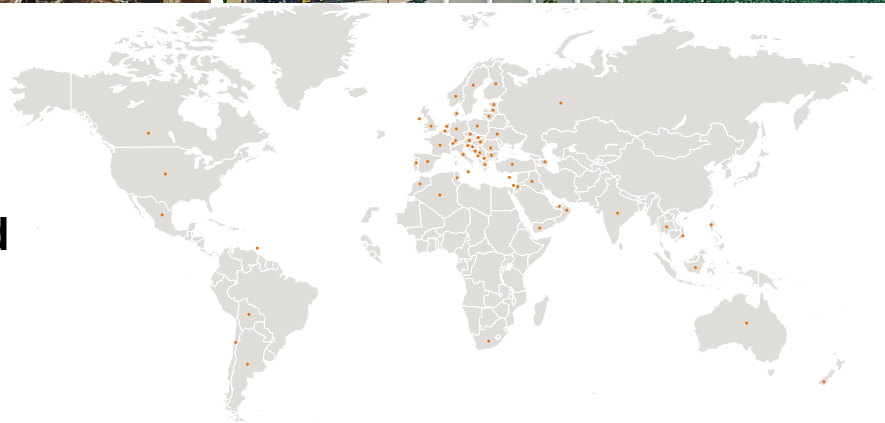

With highly motivated employees, a great deal of commitment and expertise ATLAS GmbH develops successful crane & excavator technologies. Numerous customers, engineers and experts all around the globe have made their contribution. The result is robust equipment to enable you to work more effectively and safely than ever before.

As our know-how grew, so too did our dealer and service network worldwide.

We can hence guarantee – in those days and today too – that we will always be on the spot when you need us.



Atlas manufactures a wide range of equipment for the construction, railroad, material handling and infrastructure industries. You will find more information on Atlas under www.atlasgmbh.com.

CONSTRUCTION



TRANSPORT



INFRASTRUCTURE



RECYCLING



CUSTOMER SATISFACTION IS OUR PRIORITY!

WE ARE COMMITTED

to providing our customers with highest quality products and services.

QUALITY STANDARDS AND CUSTOMER SATISFACTION

are measured in terms of service performance, reliability, relevance and timeliness.

OUR COMPANY'S MISSION, GOALS AND OBJECTIVES

are directed towards ongoing process improvement as a basis for strengthening our competitive position and for improving product quality and service standards.

QUALITY STANDARDS AND CUSTOMER SATISFACTION

are measured in terms of product performance and reliability.

PRODUCT RANGE

200MH *blue*





**EXTENSIVE DEALER NETWORK
EXCELLENT SERVICE
CUSTOMER FOCUSED**

ATLAS - The new excavator cabin



The new ATLAS cabin – Best climate, sharp display, digital and direct, more space, best view, extremely quiet, feel good

Clear control panel – Direct selection via keys or digital control via button.....



Move safely: Standard lateral- and rear view cameras



Most powerful air conditioning system - short airways - large lines - cross sections - silent



Best view – especially to the right



ATLAS SINCE 1939 - The new excavator cabin

Stay communicated - radio with USB connection - mobile phone tray by the left joystick



Easy: Upper carriage lock at the push of a button on T



If thirsty: Close at hand and quickly released



Lunch break - space for cool box with electrical connection - behind the driver's seat



Floor non-slip and Easy to sweep - storage space for tools and materials



TECHNICAL SPECIFICATION 200MH

ENGINE

Power rating..... 143 HP	Bore / cylinder stroke 101 / 126	STANDARD BASIC EQUIPMENT:
RPM 1800 rpm	Cooling system Water-cooled	• Automatic idling system / Engine stop
Model..... Deutz TCD 6.1 L6 EU Stage V	Air filter..... Dry air filter	• Cold start assistance
Design..... Turbocharger / intercooler	Battery..... 2 x 12 V / 100 Ah	• Diesel pre-filter
Cylinder capacity 370 in ³	Generator 24 V / 100 A	• Engine monitoring
Number of cylinders 6	Starter..... 24 V / 4.8 kW	

HYDRAULIC SYSTEM

• AWE 5 system (Load sensing)	• Pipe break protection valves for lifting and articulated cylinders	• Operating modes:
• Load limit controlled high-performance pump	• Proportional grab and grab rotating function	F1 (Fine)
• Fuel-efficient flow-on-demand control	• 3 circuits for additional consumer loads possible	F2 (Eco)
• Sensitive, proportional, independent control	• Max. oil flow 68.7 gal/min	F3 (Power)
• Primary and secondary protection against overload	• Max. operating pressure 5076 PSI	• Accumulator for emergency lowering of the arm system
• Suction valves for all work functions	• Cylinder end position damping	• Load-limit control

SWING ASSEMBLY

• Axial piston motor with priority valve	• Automatically controlled multi-disc brake	• Swing torque..... 36,140 lbf-ft
• Planetary transmission	• Two, two-stage valves	• Max. swing speed. 8 rpm

TRACTION DRIVE AND BRAKES

• Variable displacement motor	• Automotive traveling and cruise control:	• Tractive force..... 20840 lbf
• Power-shift transmission	• Max. speed 12.4 mph	• Gradeability 55 %
• Double-acting brake valve	• Off-road speed 3.1 mph	• Dual-circuit brake system Multi-disc
• Travel direction pre-selection via switch in joystick	• Crawling speed..... 0.6 mph	• Parking brake Multi-disc

UNDERCARRIAGE

• Steering axle with automatic oscillating axle locking	• Heavy duty axles	• STD tires: Mitas 10.00-20 16PR EM23
• Additional axis locking via left joystick	• Toolbox in undercarriage	

TIRES

OPTIONAL:

• 4-road tyres 600/40 – 22.5 14PR Mitas	• 8-road tyres 10.00-20 16PR Nokia	• 8-road tyres 315/70 R22.5 Marked with a band, Grader type
• 4-road tyres 600/40 – 22.5 18PR Alliance	• 8-road tyres 10.00-20 16PR profile for asphalt use	• 8-road tyres 215/70 R22.5 Caliber Power Grip 23
• 4-road tyres 710/40 – 22.5 24PR Nokia	• 8-road tyres 10.00-20 Super elastic (up to 10 mph)	

WORKING EQUIPMENT 200MH

DRIVER'S CAB

<ul style="list-style-type: none"> • Meets latest safety standards (ROPS) • Extra large entry zone • Spacious leg room • Radio preparation with mute function • Ready for electric cooling box • Different options for storage, compartment for documents • Heat-absorbing glass, tinted windows • Excellent all-way visibility • Bottle holder 	DRIVER'S SEAT: <ul style="list-style-type: none"> • Comfort seat with headrest • Arm rests and lumbar support • Seat adjustable separately from console • Air suspension • Heated • Horizontal and vertical suspension • Lumbar support 	MONITORING: <ul style="list-style-type: none"> • Operating data display screen • Automatic system for monitoring, warning and storage of data • Rear view security camera • Right side camera
	CONTROL: <ul style="list-style-type: none"> • Ergonomic joysticks with proportional slide control • Slim steering column, height and tilt adjustable • Indicators, controls and operating switches are clearly arranged • Swing axle lock in the left joystick 	CLIMATE CONTROL: <ul style="list-style-type: none"> • Automatic climate control • Excellent air distribution through optimally arranged nozzles • Refrigerant R134a
		SOUND LEVELS: <ul style="list-style-type: none"> • ISO 6396 (L_pA) in driver's cab 69 dB(A) • 2000/14 EG (L_wA) ambience level 97 dB(A)

ADDITIONAL EQUIPMENT

<ul style="list-style-type: none"> • Refueling pump • Beacon light • Gear protection • Cabin Sliding door • Cab protection guard • Cab elevation • Joystick steering • 270° camera system 	<ul style="list-style-type: none"> • LED working lights • Alarm-signal while driving • Auxiliary heating with water circuit • Automatic working brake • Switch hydraulic attachment kit, supports separately at front and rear • Hydraulic add-on kit, switch supports axially separately • Proportional control of supports by slide in joystick • Automatically controlled and monitored electric central lubrication system for uppercarriage and arm equipment 	<ul style="list-style-type: none"> • Premium Driver seat (Actimo Evolution) • Electric cooling box • Radio with USB • GPS/GSM telemetric system for monitoring of operating data, consumption, position • Biodegradable oil • Wide axles (overall width 9') • Support shield <p>Other additional equipment: See price list</p> <p>Special options: upon request</p>
---	--	--

FILL CAPACITIES

• Fuel tank 79.5 gal	• Engine oil..... 4 gal	• Hydraulics system 92.5 gal
• Cooling system..... 10 gal	• Hydraulic tank 47.5 gal	• Ad Blue® 8.5 gal

OPERATING WEIGHTS

	MONOBLOCK BOOM 19' 8" (C6.6i)		ADJUSTABLE BOOM Base arm 6' 2" (C6.41) Boom 10' 2" (C6.46)
	Stick 13' 1" (D6.14i)	Stick 13' 1" (D6.14iS)	Stick 8' 8" (D6.3)
Support dozer blade			
SDB / outriggers	45,195 / 46,958 lbs	45,636 / 47,400 lbs	
4 support outriggers	45,856 / 47,620 lbs	46,297 / 48,061 lbs	


Operating weight incl. driver, fuel, lubricants and coolant plus 1.0 ton for attachments

ATTACHMENTS (SELECTION)


	Bucket F415	Bucket F418	Trench digger G644
Capacity SAE	23.7 ft ³	32.5 ft ³	19.8 ft ³
Cutting width	2' 9.5"	3' 7.3"	36' 6.7"

WORKING RANGES 200MH


Loading boom 19' 8" (C6.6i) + Stick 13' 1" (D6.14i)

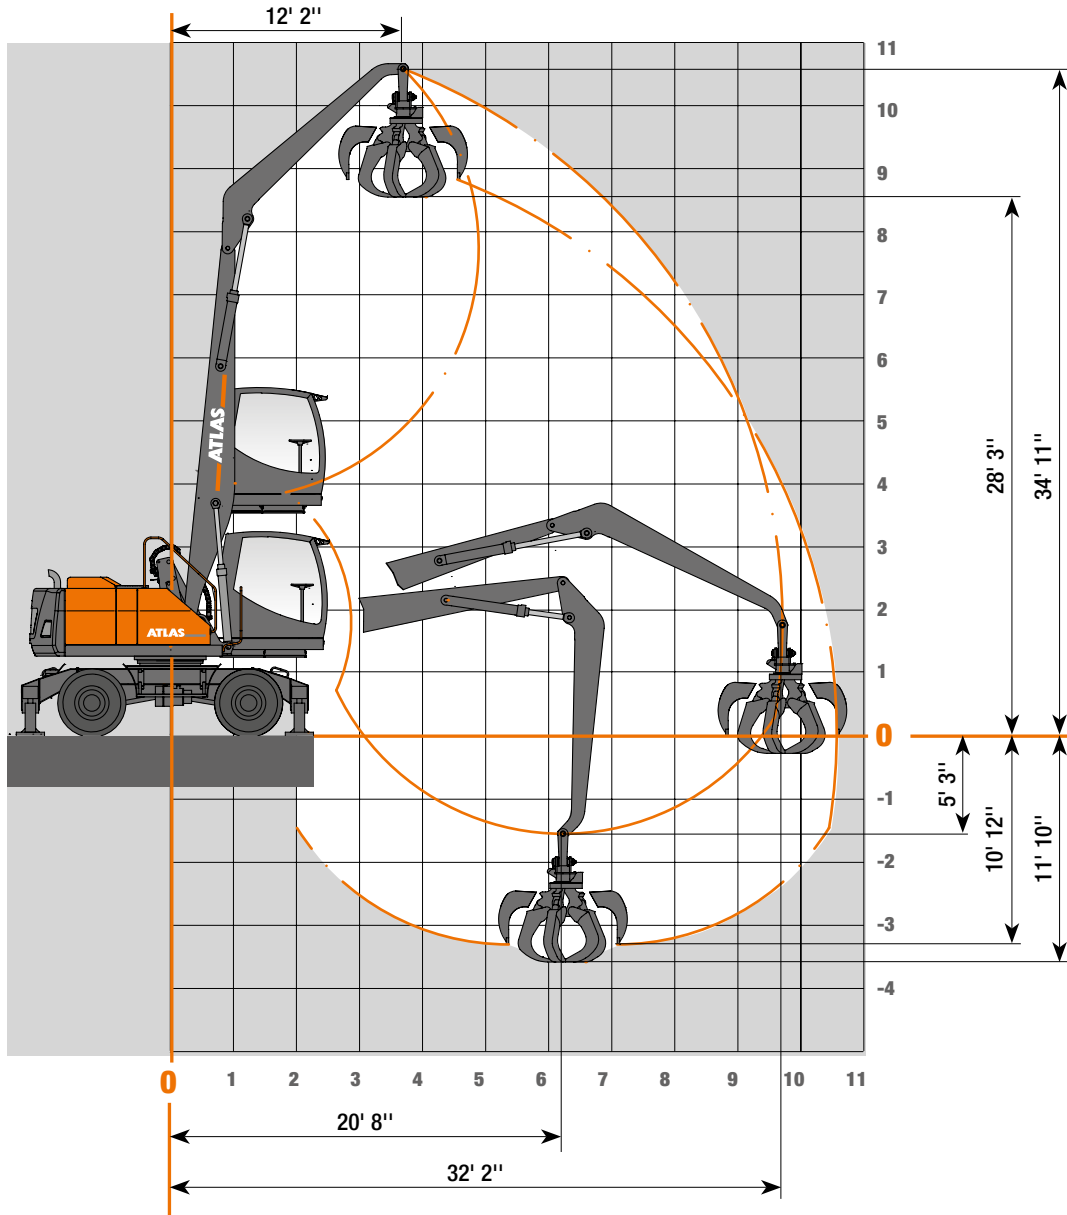


Attachments




Load hook




Log grab




Clamshell grab



Orange peel grab





















Load lifting magnet



Sorting grapple

LIFTING CAPACITIES 200MH

Lifting capacities: Loading boom 19' 8" (C6.6i) with Stick 13' 1" (D6.14i). Max. reach 33' 4"

HEIGHT	Undercarriage position		9' 10"	11' 6"	13' 1"	14' 9"	16' 5"	18' 1"	19' 8"	21' 4"	23'	24' 7"	26' 3"	27' 11"	29' 6"
26' 3"	FRONT 	outriggers down			16 210	13 942	12 846	11 920	11 120*	10 412*					
		outriggers up			16 210	13 942	12 846	11 920	10 615	9 361					
	LATERAL 	outriggers down			16 210*	13 942*	12 846*	11 920*	11 120*	10 412*					
		outriggers up			14 522	12 513	10 653	9 202	8 036	7 077					
23'	FRONT 	outriggers down			16 083	14 021	12 901	11 951	11 129*	10 399*	9 742*	9 129*			
		outriggers up			16 083	14 021	12 901	11 951	10 617	9 378	8 353	7 489			
	LATERAL 	outriggers down			16 083*	14 021*	12 901*	11 951*	11 129*	10 399*	9 742*	9 129*			
		outriggers up			14 517	12 480	10 628	9 189	8 038	7 094	6 307	5 637			
19' 8"	FRONT 	outriggers down			15 814	14 356	13 153	12 134*	11 254*	10 478*	9 784*	9 145*	8 541*		
		outriggers up			15 814	14 356	13 153	12 024	10 523	9 310	8 309	7 467	6 748		
	LATERAL 	outriggers down			15 814*	14 356*	13 153*	12 134*	11 254*	10 478*	9 784*	9 145*	8 541*		
		outriggers up			14 601	12 299	10 483	9 072	7 948	7 028	6 263	5 615	5 057		
16' 5"	FRONT 	outriggers down	16 620	18 547	16 570	14 912	13 558	12 425*	11 455*	10 609*	9 857*	9 173*	8 534*	7 917*	
		outriggers up	16 620	18 547	16 570	14 912	13 558	11 797	10 342	9 169	8 201	7 388	6 695	6 096	
	LATERAL 	outriggers down	16 620	18 547*	16 570*	14 912*	13 558*	12 425*	11 455*	10 609*	9 857*	9 173*	8 534*	7 917*	
		outriggers up	16 620	17 544	14 299	11 962	10 214	8 860	7 778	6 896	6 162	5 540	5 004	4 539	
13' 1"	FRONT 	outriggers down	21 823	20 027	17 518	15 575*	14 019*	12 738*	11 658*	10 728*	9 907*	9 171*	8 490*	7 844*	7 196*
		outriggers up	21 823	20 027	17 518	15 531	13 234	11 479	10 093	8 973	8 047	7 269	6 605	6 034	5 536
	LATERAL 	outriggers down	21 823*	20 027*	17 518*	15 575*	14 019*	12 738*	11 658*	10 728*	9 907*	9 171*	8 490*	7 844*	7 196*
		outriggers up	21 246	16 689	13 644	11 466	9 833	8 560	7 544	6 711	6 014	5 426	4 918	4 480	4 098
9' 10"	FRONT 	outriggers down	25 243	21 208	18 296*	16 087*	14 348*	12 934*	11 755*	10 747*	9 868*	9 079*	8 360*	7 676*	6 995*
		outriggers up	25 243	21 208	17 762	14 877	12 745	11 105	9 802	8 743	7 866	7 125	6 497	5 955	5 481
	LATERAL 	outriggers down	25 243*	21 208*	18 296*	16 087*	14 348*	12 934*	11 755*	10 747*	9 868*	9 079*	8 360*	7 676*	6 995*
		outriggers up	19 440	15 509	12 820	10 864	9 378	8 210	7 269	6 493	5 842	5 289	4 817	4 405	4 043
6' 7"	FRONT 	outriggers down	2 952	11 832	18 281*	16 056*	14 279*	12 822*	11 605*	10 564*	9 652*	8 834*	8 080*	7 359*	6 638*
		outriggers up	2 952	11 832	16 867	14 226	12 255	10 728	9 508	8 514	7 687	6 989	6 391	5 873	5 419
	LATERAL 	outriggers down	2 952	11 832	18 281*	16 056*	14 279*	12 822*	11 605*	10 564*	9 652*	8 834*	8 080*	7 359*	6 638*
		outriggers up	2 952	11 832	12 008	10 265	8 922	7 857	6 991	6 274	5 672	5 159	4 713	4 325	3 986
3' 3"	FRONT 	outriggers down		6 784	14 266	15 176*	13 596*	12 247*	11 083*	10 068*	9 165*	8 340*	7 568*	6 821*	6 054*
		outriggers up		6 784	14 266	13 750	11 881	10 432	9 273	8 325	7 535	6 867	6 294	5 798	5 366
	LATERAL 	outriggers down		6 784	14 266*	15 176*	13 596*	12 247*	11 083*	10 068*	9 165*	8 340*	7 568*	6 821*	6 054*
		outriggers up		6 784	11 460	9 826	8 574	7 579	6 768	6 096	5 527	5 042	4 621	4 255	3 933
0	FRONT 	outriggers down		7 304	12 152	13 322	12 150*	11 056*	10 055*	9 142*	8 300*	7 507*	6 742*	5 974*	5 157
		outriggers up		7 304	12 152	13 322	11 638	10 225	9 101	8 183	7 421	6 775	6 221	5 743	5 157
	LATERAL 	outriggers down		7 304	12 152*	13 322*	12 150*	11 056*	10 055*	9 142*	8 300*	7 507*	6 742*	5 974*	5 157*
		outriggers up		7 304	11 175	9 566	8 347	7 385	6 607	5 961	5 417	4 952	4 550	4 202	3 898


The specified max. loading capacities in pounds (lbs) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values.

*Value limited due to excavator stability.


All loading capacities are listed with 8' 2" undercarriage width. The undercarriage may be delivered with 9' width as an option.

WORKING RANGES 200MH


Loading boom 19' 8" (C6.6i) + Stick 13' 1" (D6.14iS)

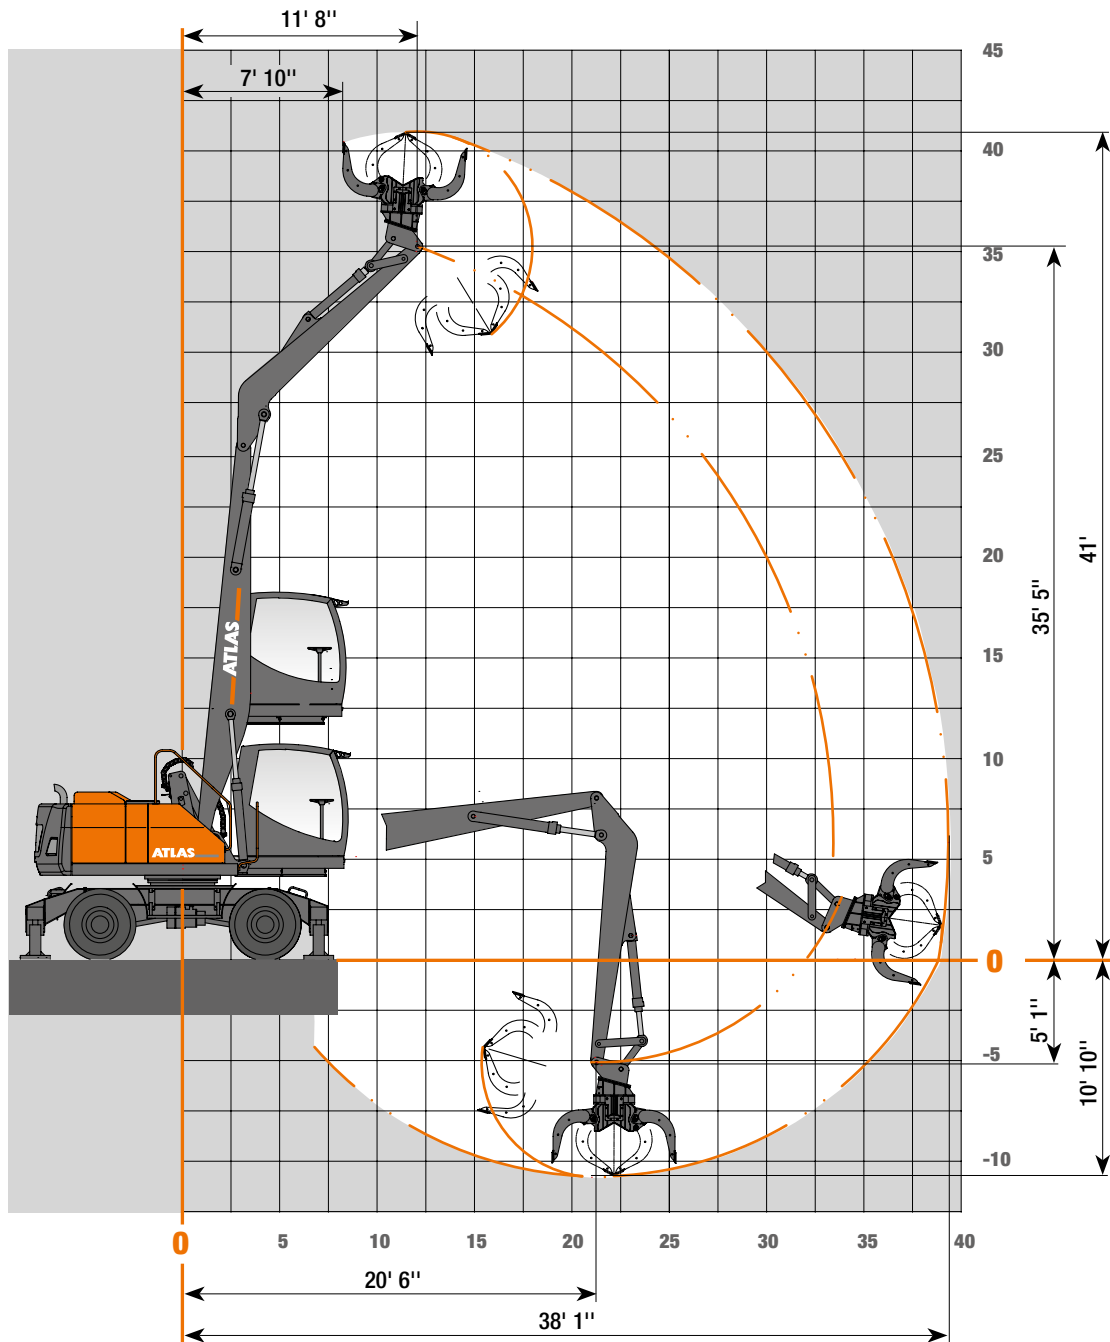


Attachments



Load hook




Log grab




Clamshell grab



Orange peel grab





















Load lifting magnet



Sorting grapple

LIFTING CAPACITIES 200MH

Lifting capacities: Loading boom 19' 8" (C6.6i) with Stick 13' 1" (D6.14iS) Max. reach 36' 3"

HEIGHT	Undercarriage position		9' 10"	11' 6"	13' 1"	14' 9"	16' 5"	18' 1"	19' 8"	21' 4"	23'	24' 7"	26' 3"	27' 11"	29' 6"	
26' 3"	FRONT 	outriggers down			16 210	13 942	12 846	11 920	11 120*	10 412*						
		outriggers up			16 210	13 942	12 846	11 920	10 615	9 361						
	LATERAL 	outriggers down			16 210*	13 942*	12 846*	11 920*	11 120*	10 412*						
		outriggers up			14 522	12 513	10 653	9 202	8 036	7 079						
23'	FRONT 	outriggers down			16 083	14 019	12 899	11 949	11 127*	10 399*	9 740*	9 129*				
		outriggers up			16 083	14 019	12 899	11 949	10 615	9 378	8 353	7 489				
	LATERAL 	outriggers down			16 083*	14 019*	12 899*	11 949*	11 127*	10 399*	9 740*	9 129*				
		outriggers up			14 519	12 478	10 626	9 189	8 038	7 094	6 307	5 637				
19' 8"	FRONT 	outriggers down			15 809	14 352	13 150	12 132*	11 252*	10 478*	9 782*	9 142*	8 538*			
		outriggers up			15 809	14 352	13 150	12 022	10 520	9 308	8 307	7 467	6 748			
	LATERAL 	outriggers down			15 809*	14 352*	13 150*	12 132*	11 252*	10 478*	9 782*	9 142*	8 538*			
		outriggers up			14 605	12 295	10 481	9 070	7 945	7 028	6 263	5 615	5 057			
16' 5"	FRONT 	outriggers down	18 023	18 651	16 563	14 908	13 554	12 421*	11 451*	10 606*	9 855*	9 171*	8 534*	7 917*		
		outriggers up	18 023	18 651	16 563	14 908	13 554	11 792	10 340	9 167	8 199	7 385	6 693	6 094		
	LATERAL 	outriggers down	18 023	18 651*	16 563*	14 908*	13 554*	12 421*	11 451*	10 606*	9 855*	9 171*	8 534*	7 917*		
		outriggers up	18 023	17 551	14 292	11 958	10 210	8 856	7 776	6 894	6 160	5 538	5 004	4 539		
13' 1"	FRONT 	outriggers down	23 400	20 018	17 511	15 569*	14 015*	12 734*	11 656*	10 725*	9 905*	9 169*	8 488*	7 842*	7 194*	
		outriggers up	23 400	20 018	17 511	15 525	13 230	11 475	10 090	8 971	8 045	7 266	6 603	6 032	5 536	
	LATERAL 	outriggers down	23 400*	20 018*	17 511*	15 569*	14 015*	12 734*	11 656*	10 725*	9 905*	9 169*	8 488*	7 842*	7 194*	
		outriggers up	21 235	16 680	13 638	11 462	9 828	8 558	7 540	6 706	6 012	5 423	4 916	4 480	4 096	
9' 10"	FRONT 	outriggers down	25 232	21 199	18 287*	16 080*	14 341*	12 930*	11 751*	10 743*	9 863*	9 076*	8 358*	7 674*	6 993*	
		outriggers up	25 232	21 199	17 754	14 870	12 738	11 100	9 797	8 739	7 862	7 123	6 495	5 952	5 478	
	LATERAL 	outriggers down	25 232*	21 199*	18 287*	16 080*	14 341*	12 930*	11 751*	10 743*	9 863*	9 076*	8 358*	7 674*	6 993*	
		outriggers up	19 429	15 501	12 811	10 858	9 372	8 206	7 264	6 488	5 838	5 284	4 815	4 403	4 043	
6' 7"	FRONT 	outriggers down		14 167	18 274*	16 049*	14 273*	12 818*	11 601*	10 560*	9 650*	8 832*	8 078*	7 357*	6 636*	
		outriggers up		14 167	16 859	14 220	12 249	10 723	9 504	8 510	7 685	6 986	6 389	5 871	5 419	
	LATERAL 	outriggers down		14 167	18 274*	16 049*	14 273*	12 818*	6 986*	10 560*	9 650*	8 832*	8 078*	7 357*	6 636*	
		outriggers up		14 167	12 000	10 258	8 918	7 851	6 986	6 272	5 668	5 154	4 711	4 323	3 984	
3' 3"	FRONT 	outriggers down		8 073	15 902	15 170*	13 589*	12 240*	11 078*	10 064*	9 160*	8 336*	7 566*	6 819*	6 052*	
		outriggers up		8 073	15 902	13 743	11 874	10 426	9 268	8 320	7 531	6 863	6 292	5 796	5 364	
	LATERAL 	outriggers down		8 073	15 902*	15 170*	13 589*	12 240*	11 078*	10 064*	9 160*	8 336*	7 566*	6 819*	6 052*	
		outriggers up		8 073	11 451	9 819	8 567	7 573	6 764	6 091	5 525	5 038	4 619	4 253	3 931	
0	FRONT 	outriggers down		8 285	13 252	13 316	12 143*	11 049*	10 051*	9 138*	8 296*	7 504*	6 739*	5 972*	5 154	
		outriggers up		8 285	13 252	13 316	11 631	10 221	9 096	8 179	7 416	6 770	6 219	5 741	5 154	
	LATERAL 	outriggers down		8 285	13 252*	13 316*	12 143*	11 049*	10 051*	9 138*	8 296*	7 504*	6 739*	5 972*	5 154*	
		outriggers up		8 285	11 169	9 561	8 342	7 381	6 603	5 957	5 414	4 949	4 548	4 200	3 896	


The specified max. loading capacities in pounds (lbs) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values.

*Value limited due to excavator stability.


All loading capacities are listed with 8' 2" undercarriage width. The undercarriage may be delivered with 9' width as an option.

WORKING RANGES 200MH


Adjustable Boom, Base Arm 6' 2" (C6.41) and Boom 11' 11" (C6.461) + Stick 8' 8" (D6.3)

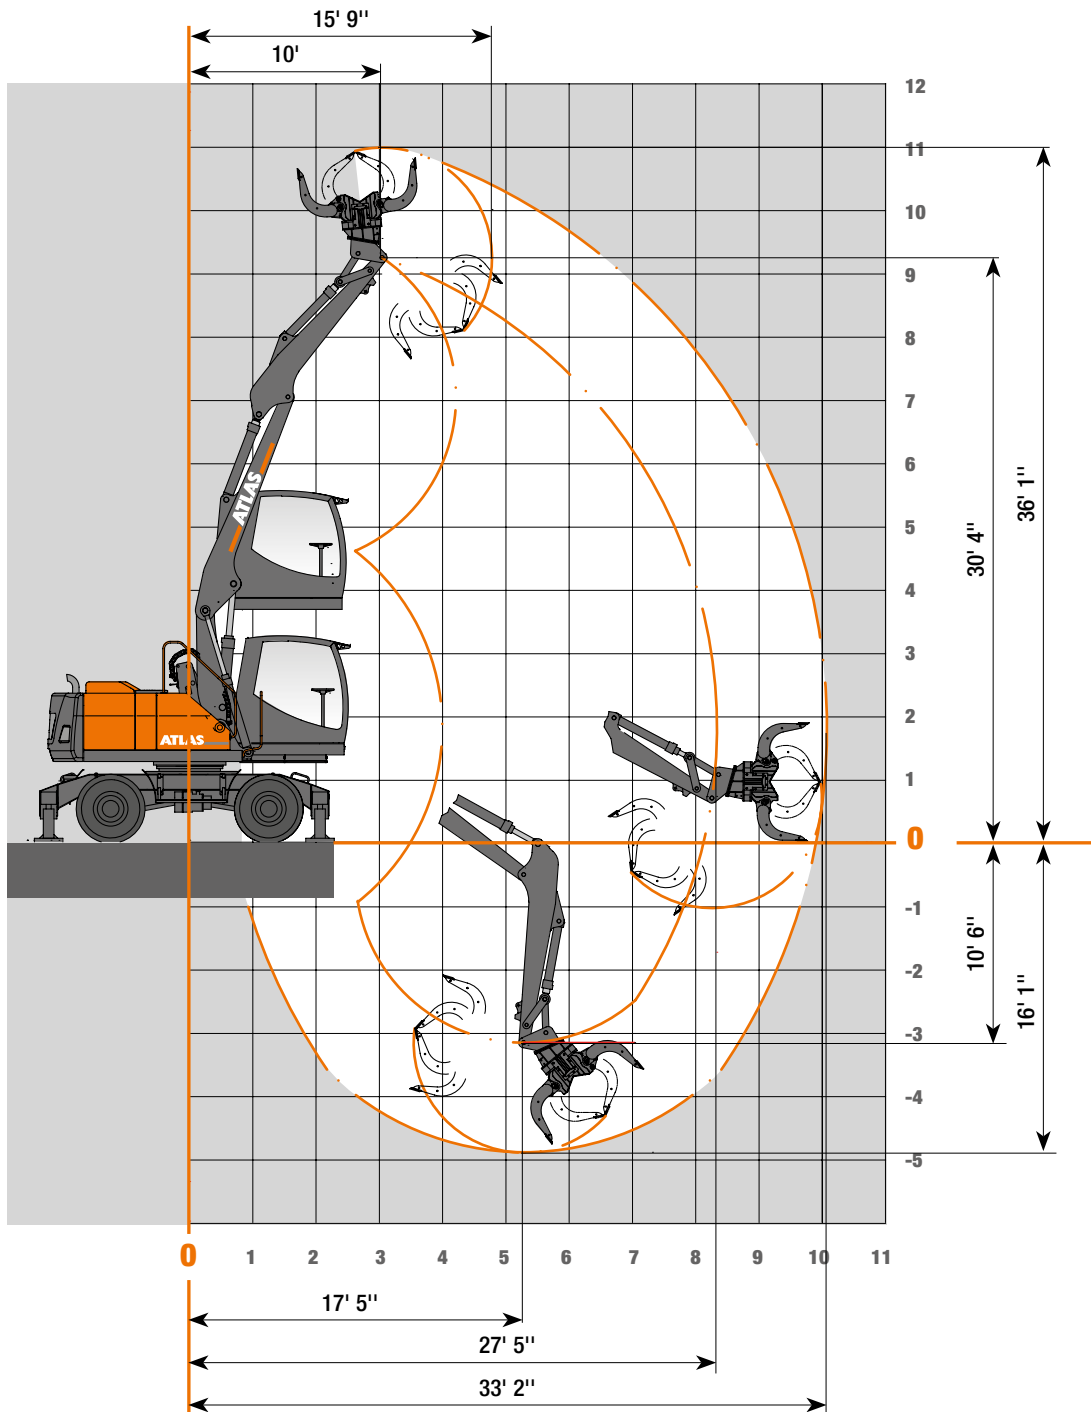


Attachments



Load hook




Log grab




Clamshell grab



Orange peel grab




















Load lifting magnet



Sorting grapple

LIFTING CAPACITIES 200MH

Adjustable Boom, Base Arm 6' 2" (C6.41) and Boom 11' 11" (C6.461) + Stick 8' 8" (D6.3). Max. reach 31' 11"

HEIGHT	Undercarriage position		6' 7"	8' 2"	9' 10"	11' 6"	13' 1"	14' 9"	16' 5"	18' 1"	19' 8"	21' 4"	23'	24' 7"	26' 3"
26' 3"	FRONT 	outriggers down					8 713	8 170	8 051						
		outriggers up					8 713	8 170	8 051						
26' 3"	LATERAL 	outriggers down					8 713	8 170	8 051						
		outriggers up					8 713	8 170	8 051						
21' 4"	FRONT 	outriggers down						8 000	7 641	7 191	7 086	6 922			
		outriggers up						8 000	7 641	7 191	7 086	6 922			
21' 4"	LATERAL 	outriggers down						8 000	7 641	7 191	7 086	6 373*			
		outriggers up						8 000	7 641	7 191	7 086	6 922			
16' 5"	FRONT 	outriggers down				10 615	9 239	8 757	7 989	7 732	7 273	6 940	6 592	6 451	
		outriggers up				10 615	9 239	8 757	7 989	7 732	7 273	6 940	6 592	6 451	
16' 5"	LATERAL 	outriggers down				10 615	9 239	8 757	7 989	7 732	7 273	6 662*	5 809*	5 046*	
		outriggers up				10 615	9 239	8 757	7 989	7 732	7 273	6 940	6 592	6 451	
11' 6"	FRONT 	outriggers down			12 207	12 840	11 700	10 293	9 248	8 472	7 751	7 344	6 942	6 493	6 224
		outriggers up			12 207	12 840	11 700	10 293	9 248	8 472	7 751	7 344	6 942	6 493	6 034*
11' 6"	LATERAL 	outriggers down			12 207	12 840	11 700	10 293	9 248	8 283*	7 432*	6 691*	5 833*	5 082*	4 473*
		outriggers up			12 207	12 840	11 700	10 293	9 248	8 472	7 751	7 344	6 942	6 493	6 224
6' 7"	FRONT 	outriggers down		15 181	14 969	14 303	13 413	11 658	10 192	9 328	8 428	7 818	7 211	6 737	6 270
		outriggers up		15 181	14 969	14 303	13 413	11 658	10 192	9 328	8 428	7 818	7 211	6 678*	5 997*
6' 7"	LATERAL 	outriggers down		15 181	14 969	14 303	12 266*	10 631*	9 251*	8 146*	7 359*	6 585*	5 650*	4 971*	4 436*
		outriggers up		15 181	14 969	14 303	13 413	11 658	10 192	9 328	8 428	7 818	7 211	6 737	6 270
1' 8"	FRONT 	outriggers down	33 336	24 852	19 912	16 285	13 949	12 143	10 734	9 625	8 702	7 950	7 293	6 764	6 254
		outriggers up	33 336	24 852	19 912	16 285	13 949	12 143	10 734	9 625	8 702	7 950	7 293	6 565*	5 880*
1' 8"	LATERAL 	outriggers down	33 336	24 486*	18 080*	14 822*	12 255*	10 408*	9 010*	7 998*	7 033*	6 177*	5 439*	4 859*	4 325*
		outriggers up	33 336	24 852	19 912	16 285	13 949	12 143	10 734	9 625	8 702	7 950	7 293	6 764	6 254
0	FRONT 	outriggers down	34 725	25 624	20 150	16 695	14 061	12 260	10 829	9 691	8 772	8 045	7 434	6 585	
		outriggers up	34 725	25 624	20 150	16 695	14 061	12 260	10 829	9 691	8 772	7 948*	7 094*	6 407*	
0	LATERAL 	outriggers down	34 725	23 325*	17 385*	13 975*	11 530*	9 868*	8 629*	7 608*	6 682*	5 869*	5 220*	4 707*	
		outriggers up	34 725	25 624	20 150	16 695	14 061	12 260	10 829	9 691	8 772	8 045	7 434	6 585	
- 8' 2"	FRONT 	outriggers down	35 891	26 305	20 816	17 072	14 628	12 736	11 314	10 068	8 774	7 306	5 315		
		outriggers up	35 891	26 305	20 816	17 072	14 628	12 736	11 314	9 978*	8 726*	7 306	5 315		
- 8' 2"	LATERAL 	outriggers down	35 675*	23 139*	17 469*	13 812*	11 471*	9 780*	8 400*	7 308*	6 396*	5 692*	5 128*		
		outriggers up	35 891	26 305	20 816	17 072	14 628	12 736	11 314	10 068	8 774	7 306	5 315		
- 13' 1"	FRONT 	outriggers down	34 295	25 505	19 885	16 140	13 001	10 492	7 952						
		outriggers up	34 295	25 505	19 885	16 140	13 001	10 492	7 952						
- 13' 1"	LATERAL	outriggers down	34 295	23 653*	17 522*	13 984*	11 365*	9 537*	7 952						
		outriggers up	34 295	25 505	19 885	16 140	13 001	10 492	7 952						


The specified max. loading capacities in pounds (lbs) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values.

*Value limited due to excavator stability.

All loading capacities are listed with 8' 2" undercarriage width. The undercarriage may be delivered with 9' width as an option.

DIMENSION 200MH

200MH Transport position

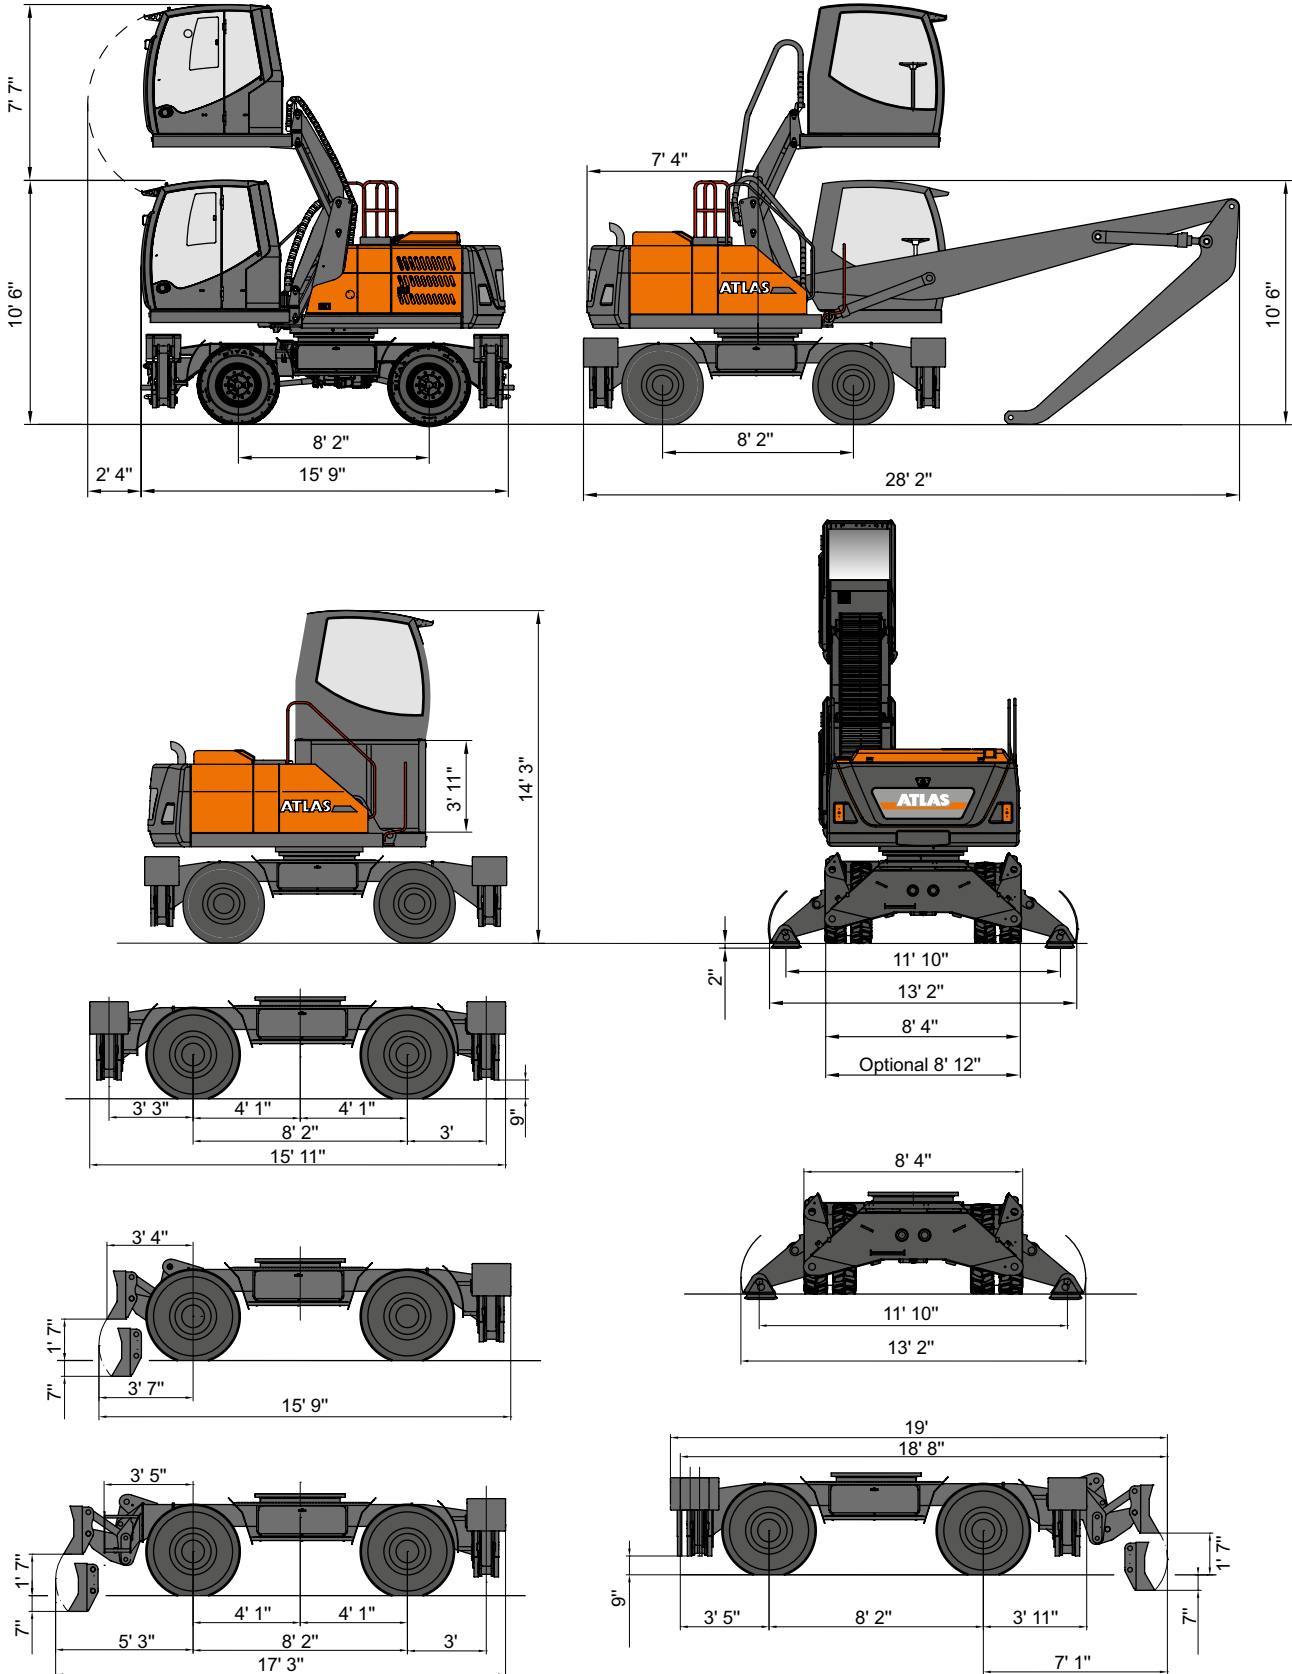



200MH-US (1) Effective date: 05/2022. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Atlas makes no other warranty, express or implied. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Atlas makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Atlas GmbH and/or its subsidiaries. All rights are reserved. Atlas® is a registered trademark of Atlas GmbH. Copyright © 2022 Atlas GmbH. Ref. no. 6214249

GANDERKESEE FACTORY

Atlas GmbH
Atlasstraße 6
D-27777 Ganderkesee,
Germany


Tel.: +49 (0) 4222 954 0
Fax: +49 (0) 4222 954 220
E-mail: info@atlasgmbh.com
www.atlasgmbh.com



VECHTA FACTORY

Atlas GmbH
Theodor-Heuss-Str. 3
D-49377 Vechta
Germany

T: +49 (0) 4441 954 0
F: +49 (0) 4441 954 299
E-mail: info@atlasgmbh.com
www.atlasgmbh.com

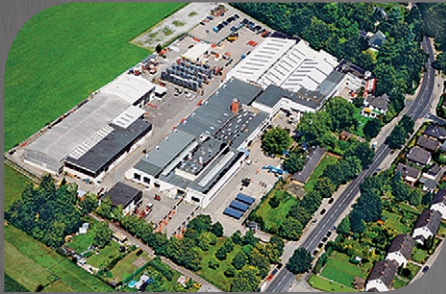

DELMENHORST FACTORY

Atlas GmbH
Stedinger Straße 324
D-27751 Delmenhorst
Germany

T: +49 (0) 4221 49 10
F: +49 (0) 4221 49 14 43
E-mail: info@atlasgmbh.com
www.atlasgmbh.com

ATLAS CRANES UK LTD NATIONAL SALES & SERVICE FACILITY

Wharfedale Road,
Euroway Trading Est.
Bradford, England BD4 6SL
United Kingdom

T: +44 8444 99 66 88
F: +44 1274 65 37 85
E-mail: atlasuk@atlasgmbh.com
www.atlas-cranes.co.uk
www.atlasgmbh.com



ATLAS
SINCE 1919

