



ATLAS

SINCE 1919

 68,784 - 73,193 lbs

 175 HP

EU Stage V

 33' 8" - 53' 8"

FAST. RELIABLE. VERSATILE.




MATERIAL HANDLING MACHINE 300MH

WWW.ATLASGMBH.COM


ATLAS – CONSTRUCTION MACHINERY MANUFACTURER WITH TRADITION

From person to person

When Hinrich Weyhausen started selling construction and agricultural machinery in 1919, he discovered that the machines which his customers actually needed were not available. So he listened to them carefully and went about building the machines himself – exactly according to the requirements of the people who used his machines every day. He carried out pioneering work with a passion under the brand name of Atlas. His focus was always on the benefit of the machines. And nothing has changed for us in terms of this ideal today.

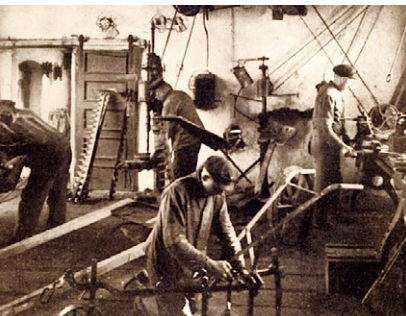

**Atlas will make you strong
with excellent products and
a comprehensive service.**

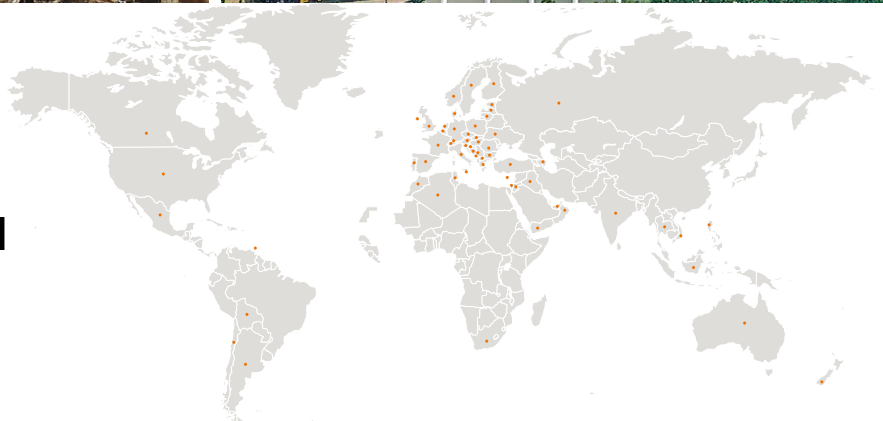

With highly motivated employees, a great deal of commitment and expertise ATLAS GmbH develops successful crane & excavator technologies. Numerous customers, engineers and experts all around the globe have made their contribution. The result is robust equipment to enable you to work more effectively and safely than ever before.

As our know-how grew, so too did our dealer and service network worldwide.

We can hence guarantee – in those days and today too – that we will always be on the spot when you need us.



Atlas manufactures a wide range of equipment for the construction, railroad, material handling and infrastructure industries. You will find more information on Atlas under www.atlasgmbh.com.

CONSTRUCTION



TRANSPORT



INFRASTRUCTURE



RECYCLING



CUSTOMER SATISFACTION IS OUR PRIORITY!

WE ARE COMMITTED

to providing our customers with highest quality products and services.

QUALITY STANDARDS AND CUSTOMER SATISFACTION

are measured in terms of service performance, reliability, relevance and timeliness.

OUR COMPANY'S MISSION, GOALS AND OBJECTIVES

are directed towards ongoing process improvement as a basis for strengthening our competitive position and for improving product quality and service standards.

QUALITY STANDARDS AND CUSTOMER SATISFACTION

are measured in terms of product performance and reliability.

PRODUCT RANGE

300MH





**EXTENSIVE DEALER NETWORK
EXCELLENT SERVICE
CUSTOMER FOCUSED**

ATLAS - The new excavator cabin



The new ATLAS cabin – Best climate, sharp display, digital and direct, more space, best view, extremely quiet, feel good

Clear control panel – Direct selection via keys or digital control via button.....



Move safely: Standard lateral- and rear view cameras



Most powerful air conditioning system - short airways - large lines - cross sections - silent



Best view – especially to the right



ATLAS SINCE 1939 - The new excavator cabin

Stay communicated - radio with USB connection - mobile phone tray by the left joystick



Easy: Upper carriage lock at the push of a button on T



Bottle holder near the driver



Lunch break - space for cool box with electrical connection - behind the driver's seat



Floor non-slip and Easy to sweep - storage space for tools and materials



TECHNICAL SPECIFICATION 300MH

ENGINE

Power rating..... 175 HP	Bore / cylinder stroke 101 / 126	STANDARD BASIC EQUIPMENT:
RPM 1800 rpm	Cooling system Water-cooled	• Automatic idling system / Engine stop
Model.....Cummins / QSB 6.7 EU Stage V	Air filter..... Dry air filter	• Diesel pre-filter
Design.....Turbocharger / intercooler	Battery 2 x 12 V / 100 Ah	• Engine monitoring
Cylinder capacity 408.9 in ³	Generator 24 V / 100 A	
Number of cylinders 6	Starter..... 24 V / 3.2 kW	

HYDRAULIC SYSTEM

• AWE 5 system (Load sensing)	• Pipe break protection valves for lifting and articulated cylinders	• Operating modes:
• Load limit controlled high-performance pump	• Proportional grab and grab rotating function	F1 (Fine)
• Fuel-efficient flow-on-demand control	• 3 circuits for additional consumer loads possible	F2 (Eco)
• Sensitive, proportional, independent control	• Max. oil flow 100 gpm	F3 (Power)
• Primary and secondary protection against overload	• Max. operating pressure 4,641 (5,076) PSI	• Accumulator for emergency lowering of the arm system
• Suction valves for all work functions	• Cylinder end position damping	• Load-limit control

SWING ASSEMBLY

• Axial piston motor with priority valve	• Automatically controlled multi-disc brake	• Swing torque 46 614 lbf ft
• Planetary transmission	• Two, two-stage valves	• Max. swing speed 11 rpm

TRACTION DRIVE AND BRAKES

• Variable displacement motor	• Automotive traveling and cruise control:	• Tractive force 24,729 lbf
• Power-shift transmission	• Max. speed 10 mph	• Gradeability 33 %
• Double-acting brake valve	• Off-road speed 3.1 mph	• Dual-circuit brake system Drum brake
• Travel direction pre-selection via switch in joystick	• Crawling speed 0.6 mph	• Parking brake Spring-loaded brake

UNDERCARRIAGE

• Steering axle with automatic oscillating axle locking	• Heavy duty axles	• STD tires: Mitas 12.00-20
• Additional axis locking via left joystick	• Toolbox in undercarriage	

WORKING EQUIPMENT 300MH

DRIVER'S CAB

<ul style="list-style-type: none"> • Meets latest safety standards (ROPS) • Extra large entry zone • Spacious leg room • Radio preparation with mute function • Ready for electric cooling box • Different options for storage, compartment for documents • Heat-absorbing glass, tinted windows • Excellent all-way visibility • Bottle holder 	DRIVER'S SEAT: <ul style="list-style-type: none"> • Comfort seat with headrest • Arm rests and lumbar support • Seat adjustable separately from console • Air suspension • Heated • Horizontal and vertical suspension • Lumbar support 	MONITORING: <ul style="list-style-type: none"> • Operating data display screen • Automatic system for monitoring, warning and storage of data • Rear view security camera • Right side camera
	CONTROL: <ul style="list-style-type: none"> • Ergonomic joysticks with proportional slide control • Slim steering column, height and tilt adjustable • Indicators, controls and operating switches are clearly arranged • Swing axle lock in the left joystick 	CLIMATE CONTROL: <ul style="list-style-type: none"> • Automatic climate control • Excellent air distribution through optimally arranged nozzles • Refrigerant R134a
		SOUND LEVELS: <ul style="list-style-type: none"> • ISO 6396 (L_pA) in driver's cab 71 dB(A) • 2000/14 EG (L_wA) ambience level 100 dB(A)

ADDITIONAL EQUIPMENT

<ul style="list-style-type: none"> • Beacon light • Gear protection • Cabin Sliding door • Cab protection guard • Cab elevation • Joystick steering • 270° camera system • LED working lights 	<ul style="list-style-type: none"> • Alarm-signal while driving • Auxiliary heating with water circuit • Automatic working brake • Switch hydraulic attachment kit, supports separately at front and rear • Hydraulic add-on kit, switch supports axially separately • Proportional control of supports by slide in joystick • Automatically controlled and monitored electric central lubrication system for uppercarriage and arm equipment • Premium Driver seat (Actimo Evolution) 	<ul style="list-style-type: none"> • Electric cooling box • Radio with USB • GPS/GSM telemetric system for monitoring of operating data, consumption, position • Biodegradable oil • Refueling pump
		Other additional equipment: See price list Special options: upon request

FILL CAPACITIES

• Fuel tank 101 gal	• Engine oil..... 5.3 gal	• Hydraulic system..... 106 gal
• Cooling system..... 11 gal	• Hydraulic tank 59 gal	• Ad Blue® 13 gal

OPERATING WEIGHTS

	MONOBLOCK BOOM 21' 8" (C25.5i)	MONOBLOCK BOOM 26' 3" (C25.6i)
	Stick 16' 5" (D25.15i)	Stick 19' 8" (D25.16i)
Support dozer blade		
SDB / outriggers		
4 support outriggers	72,311 lbst	73,193 lbs


Operating weight with driver, solid rubber tyres, completely filled implement and 3 307 lbs for attachments and 3 087 lbs for lift-cab (option)

ATTACHMENTS


<ul style="list-style-type: none"> • Clamshell grab • Orange peel grab 	<ul style="list-style-type: none"> • Load hook • Load lifting magnet 	<ul style="list-style-type: none"> • Log grab
--	--	--

WORKING RANGES 300MH


Loading boom 21' 8" (C25.5i) and stick 16' 5" (D25.15i)

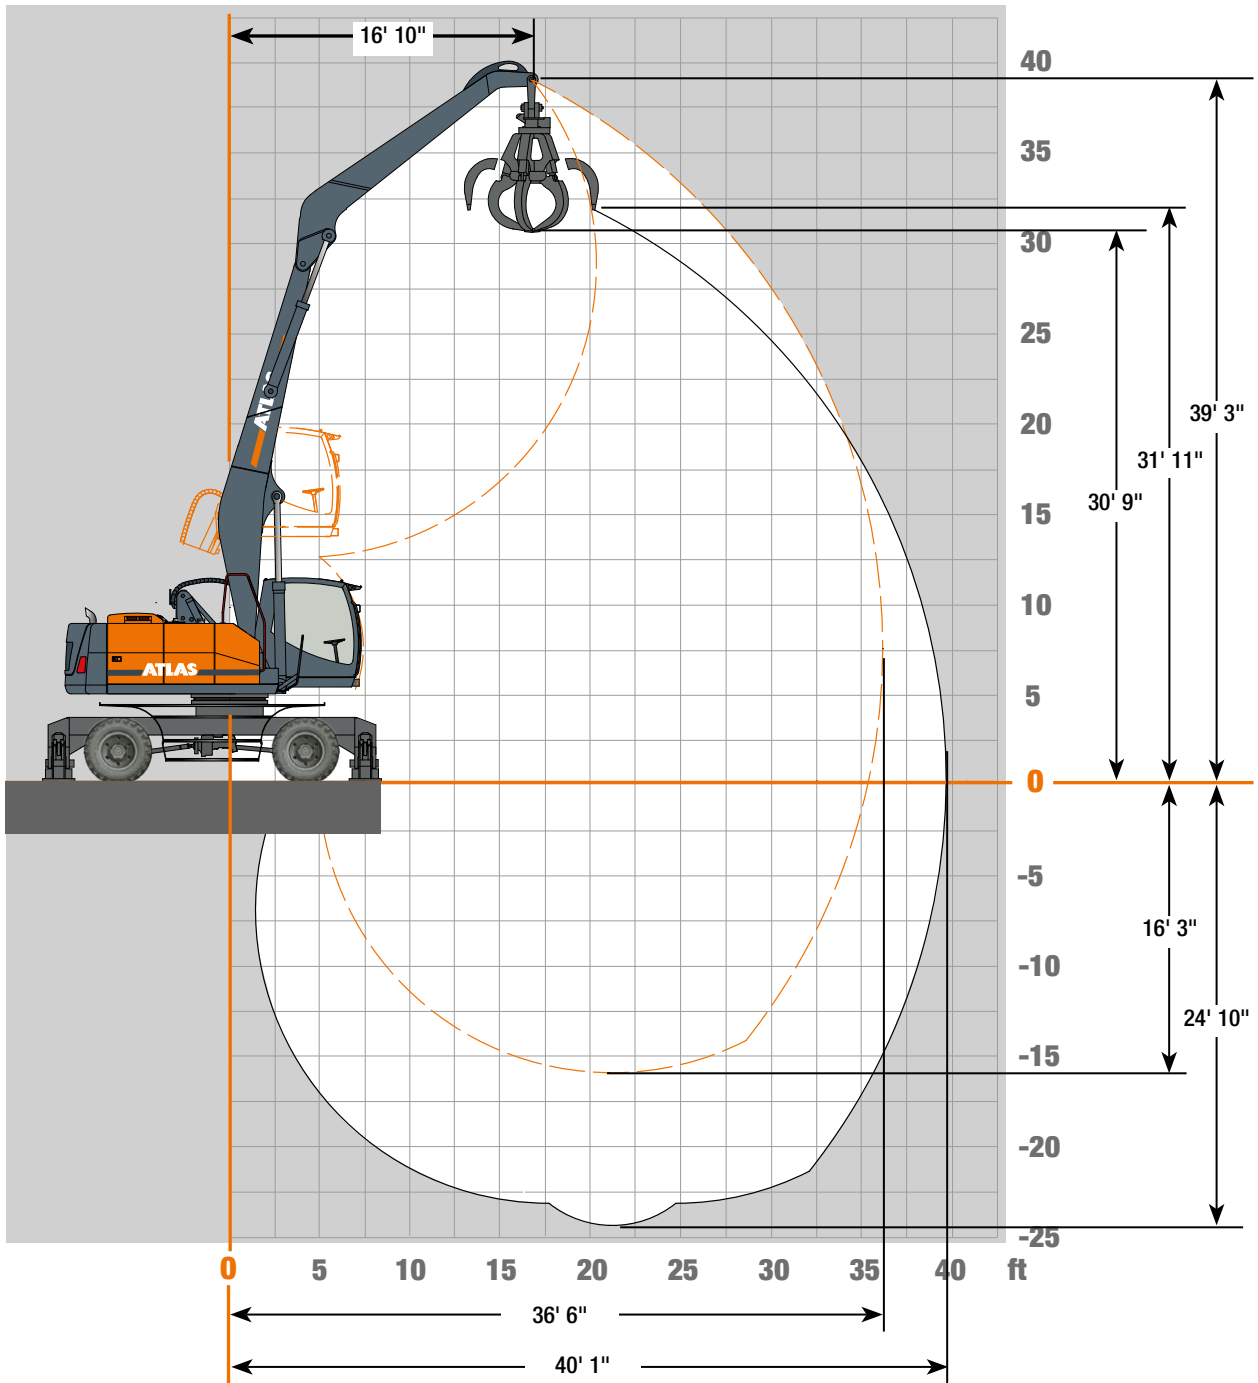


Attachments




Load hook




Log grab



Clamshell grab

























Orange peel grab



Load lifting magnet

LIFTING CAPACITIES 300MH

Lifting Capacities Loading boom 21' 8" (C25.5i) with stick 16' 5" (D25.15i). Max. reach 40' 1"


HEIGHT	Undercarriage position		11' 6"	14' 9"	18'	21' 4"	24' 7"	27' 11"	31' 2"	34' 5"
34' 5"	FRONT 	outriggers down				12 976				
		outriggers up				12 976				
	LATERAL 	outriggers down				12 773*				
		outriggers up				12 976				
29' 6"	FRONT 	outriggers down				17 086	14 643	10 060		
		outriggers up				17 086	14 643	10 060		
	LATERAL 	outriggers down				12 822*	10 174*	8 214*		
		outriggers up				17 086	14 643	10 060		
24' 7"	FRONT 	outriggers down				17 319	16 274	15 342	10 128	
		outriggers up				17 319	16 274	13 499*	10 128	
	LATERAL 	outriggers down				12 875*	10 203*	8 239*	6 768*	
		outriggers up				17 319	16 274	15 342	10 128	
19' 8"	FRONT 	outriggers down			20 099	18 289	16 900	15 712	14 625	
		outriggers up			20 099	18 289	16 418*	13 389*	11 069*	
	LATERAL 	outriggers down			16 277*	12 412*	9 958*	8 120*	6 667*	
		outriggers up			20 099	18 289	16 900	15 529*	12 857*	
14' 9"	FRONT 	outriggers down		26 314	22 480	19 923	17 915	16 329	14 969	12 086
		outriggers up		26 314	22 480	19 923	15 897*	13 042*	10 926*	9 290*
	LATERAL 	outriggers down		21 016*	15 315*	11 920*	9 511*	7 815*	6 519*	5 489*
		outriggers up		26 314	22 480	19 923	17 915	15 172*	12 718*	10 836*
9' 10"	FRONT 	outriggers down	41 056	31 100	25 415	21 715	19 008	16 982	14 925*	12 798*
		outriggers up	41 056	31 100	24 976*	19 167*	15 293*	12 637*	10 677*	9 149*
	LATERAL 	outriggers down	27 833*	18 999*	14 096*	11 111*	8 988*	7 452*	6 283*	5 353*
		outriggers up	41 056	31 100	25 415	21 715	17 882*	14 755*	12 467*	10 695*
4' 11"	FRONT 	outriggers down	46 663	34 773	27 659	23 029	19 859	17 218*	14 601*	12 566*
		outriggers up	46 663	33 252*	23 706*	18 173*	14 749*	12 200*	10 379*	8 935*
	LATERAL 	outriggers down	24 396*	17 123*	13 012*	10 295*	8 488*	7 072*	6 021*	5 165*
		outriggers up	46 663	34 773	27 659	21 449*	17 330*	14 301*	12 158*	10 474*
0	FRONT 	outriggers down	45 263	35 002	28 133	23 259	19 859	16 889*	14 383*	12 423*
		outriggers up	45 263	31 748*	22 745*	17 467*	14 187*	11 883*	10 163*	8 796*
	LATERAL 	outriggers down	22 771*	15 959*	12 174*	9 694*	8 018*	6 779*	5 818*	5 033*
		outriggers up	45 263	35 002	27 258*	20 717*	16 735*	13 982*	11 942*	10 333*
- 4' 11"	FRONT 	outriggers down	39 839	32 300	26 504	22 293	18 922	16 259	13 863	11 528
		outriggers up	39 839	31 120*	22 192*	17 205*	13 929*	11 656*	9 969*	8 728*
	LATERAL 	outriggers down	22 390*	15 454*	11 726*	9 407*	7 769*	6 574*	5 655*	4 965*
		outriggers up	39 839	32 300	26 504	20 474*	16 482*	13 748*	11 735*	10 265*
- 9' 10"	FRONT 	outriggers down	31 883	27 084	22 930	19 400	16 557	14 090	11 437	
		outriggers up	31 883	27 084	22 066*	16 896*	13 739*	11 603*	9 982*	
	LATERAL 	outriggers down	22 527*	15 401*	11 609*	9 198*	7 626*	6 517*	5 655*	
		outriggers up	31 883	27 084	22 930	19 400	16 274*	13 697*	11 437	
- 14' 9"	FRONT 	outriggers down		19 608	17 233	14 711	12 333	9 918		
		outriggers up		19 608	17 233	14 711	12 333	9 918		
	LATERAL 	outriggers down		15 659*	11 711*	9 297*	7 740*	6 620*		
		outriggers up		19 608	17 233	14 711	12 333	9 918		

The specified max. loading capacities in pounds (lbs) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values.


*Value limited due to excavator stability.

WORKING RANGES 300MH


Loading boom 26' 3" (C25.6i) and stick 19' 8" (D25.16i)

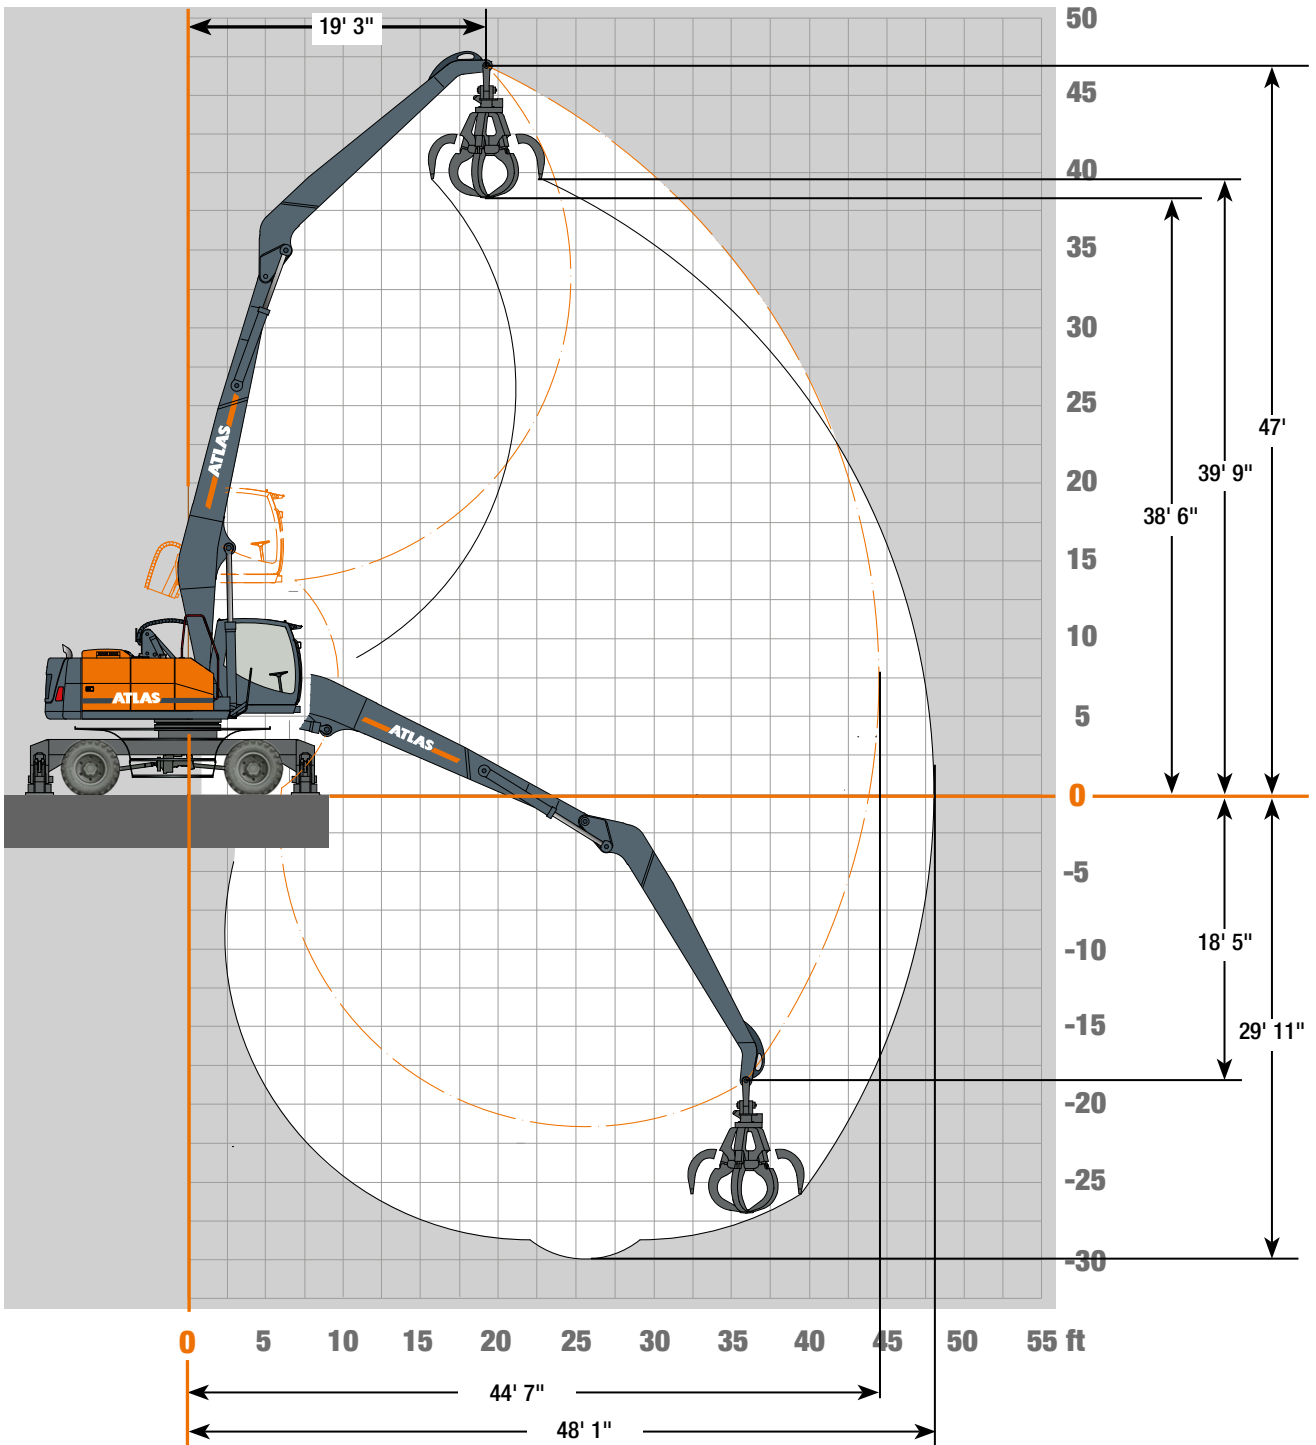


Attachments




Load hook




Log grab



Clamshell grab































Orange peel grab



Load lifting magnet

LIFTING CAPACITIES 300MH

Lifting Capacities Loading Boom 26' 3" (C25.6i) with stick 19' 8" (D25.16i). Max reach 48' 1"


HEIGHT	Undercarriage position		14' 9"	18' 1"	21' 4"	24' 7"	27' 1"	31' 2"	34' 5"	37' 9"	41'	44' 3"
44' 3"	FRONT 	outriggers down			9 517							
		outriggers up			9 517							
	LATERAL 	outriggers down			9 517							
		outriggers up			9 517							
39' 4"	FRONT 	outriggers down				11 596	8 924					
		outriggers up				11 596	8 924					
	LATERAL 	outriggers down				10 320*	8 258*					
		outriggers up				11 596	8 924					
34' 5"	FRONT 	outriggers down				13 477	12 714	10 324	6 345			
		outriggers up				13 477	12 714	10 324	6 345			
	LATERAL 	outriggers down				10 443*	8 382*	6 878*	5 525*			
		outriggers up				13 477	12 714	10 324	6 345			
29' 6"	FRONT 	outriggers down				13 596	12 736	12 004	10 701	6 407		
		outriggers up				13 596	12 736	11 338*	9 572*	6 407		
	LATERAL 	outriggers down				10 549*	8 384*	6 801*	5 637*	4 568*		
		outriggers up				13 596	12 736	12 004	10 701	6 407		
24' 7"	FRONT 	outriggers down				14 059	13 062	12 231	11 466	10 077		
		outriggers up				14 059	13 062	11 292*	9 411*	7 965*		
	LATERAL 	outriggers down				10 176*	8 153*	6 731*	5 507*	4 546*		
		outriggers up				14 059	13 062	12 231	10 981*	9 341*		
19' 8"	FRONT 	outriggers down			16 426	14 916	13 631	12 646	11 713	10 930	8 269	
		outriggers up			16 426	14 916	13 100*	10 990*	9 244*	7 897*	6 739*	
	LATERAL 	outriggers down			12 161*	9 694*	7 767*	6 453*	5 342*	4 467*	3 699*	
		outriggers up			16 426	14 916	13 631	12 646	10 814*	9 279*	7 963*	
14' 9"	FRONT 	outriggers down	24 875	21 063	18 126	16 065	14 376	13 109	12 033	10 880*	9 537*	
		outriggers up	24 875	21 063	18 126	15 507*	12 538*	10 569*	8 946*	7 652*	6 656*	
	LATERAL 	outriggers down	20 214*	14 667*	11 360*	9 006*	7 264*	6 078*	5 068*	4 250*	3 609*	
		outriggers up	24 875	21 063	18 126	16 065	14 376	12 381*	10 509*	9 026*	7 884*	
9' 10"	FRONT 	outriggers down	29 237	23 622	19 760	17 103	15 165	13 589	12 315*	10 631*	9 336*	6 082
		outriggers up	29 237	23 622	18 195*	14 548*	12 053*	10 104*	8 633*	7 414*	6 471*	5 664*
	LATERAL 	outriggers down	17 229*	13 012*	10 135*	8 190*	6 790*	5 659*	4 777*	4 030*	3 441*	2 930*
		outriggers up	29 237	23 622	19 760	17 103	14 191*	11 905*	10 192*	8 781*	7 692*	6 082
4' 11"	FRONT 	outriggers down	31 984	25 276	21 085	17 974	15 668	13 937	11 925*	10 421*	9 189*	6 612
		outriggers up	30 397*	21 806*	17 055*	13 754*	11 369*	9 694*	8 272*	7 205*	6 323*	5 571*
	LATERAL 	outriggers down	14 725*	11 285*	9 112*	7 460*	6 191*	5 271*	4 453*	3 827*	3 298*	2 842*
		outriggers up	31 984	25 276	20 359*	16 343*	13 483*	11 493*	9 819*	8 571*	7 544*	6 612
0	FRONT 	outriggers down	31 755	25 670	21 292	18 214	15 714	13 477*	11 651*	10 179*	9 045*	
		outriggers up	28 669*	20 690*	16 016*	13 062*	10 818*	9 253*	8 003*	6 980*	6 184*	
	LATERAL 	outriggers down	13 298*	10 262*	8 234*	6 839*	5 712*	4 885*	4 200*	3 624*	3 168*	
		outriggers up	31 755	25 157*	19 275*	15 633*	12 910*	11 032*	9 548*	8 340*	7 405*	
-4' 11"	FRONT 	outriggers down	29 284	24 403	20 626	17 619	15 273	13 181*	11 435*	10 051*	8 951*	
		outriggers up	27 890*	20 049*	15 538*	12 566*	10 485*	8 975*	7 798*	6 852*	6 094*	
	LATERAL 	outriggers down	12 727*	9 718*	7 793*	6 420*	5 403*	4 632*	4 010*	3 499*	3 084*	
		outriggers up	29 284	24 403	18 790*	15 115*	12 573*	10 747*	9 339*	8 212*	7 313*	
-9' 10"	FRONT 	outriggers down	25 452	21 700	18 710	16 144	14 085	12 403	10 767	9 213	7 533	
		outriggers up	25 452	19 667*	15 273*	12 297*	10 282*	8 856*	7 701*	6 770*	6 076*	
	LATERAL 	outriggers down	12 641*	9 464*	7 566*	6 197*	5 225*	4 513*	3 918*	3 433*	3 073*	
		outriggers up	25 452	21 700	18 516*	14 828*	12 361*	10 633*	9 242*	8 126*	7 293*	
-14' 9"	FRONT 	outriggers down	20 470	17 992	15 853	13 896	12 116	10 531	8 924	7 198		
		outriggers up	20 470	17 992	15 199*	12 273*	10 329*	8 838*	7 718*	6 859*		
	LATERAL 	outriggers down	12 912*	9 542*	7 540*	6 179*	5 238*	4 497*	3 933*	3 505*		
		outriggers up	20 470	17 992	15 853	13 896	12 116	10 531	8 924	7 198		
-19' 8"	FRONT 	outriggers down		13 184	11 878	10 496	9 034	7 562	5 941			
		outriggers up		13 184	11 878	10 496	9 034	7 562	5 941			
	LATERAL 	outriggers down		9 852*	7 800*	6 358*	5 346*	4 632*	4 098*			
		outriggers up		13 184	11 878	10 496	9 034	7 562	5 941			

The specified max. loading capacities in pounds (lbs) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values.


*Value limited due to excavator stability.

WORKING RANGES 300MH


Loading boom 26' 3" (C25.6i) and stick 19' 8" (D25.16is)

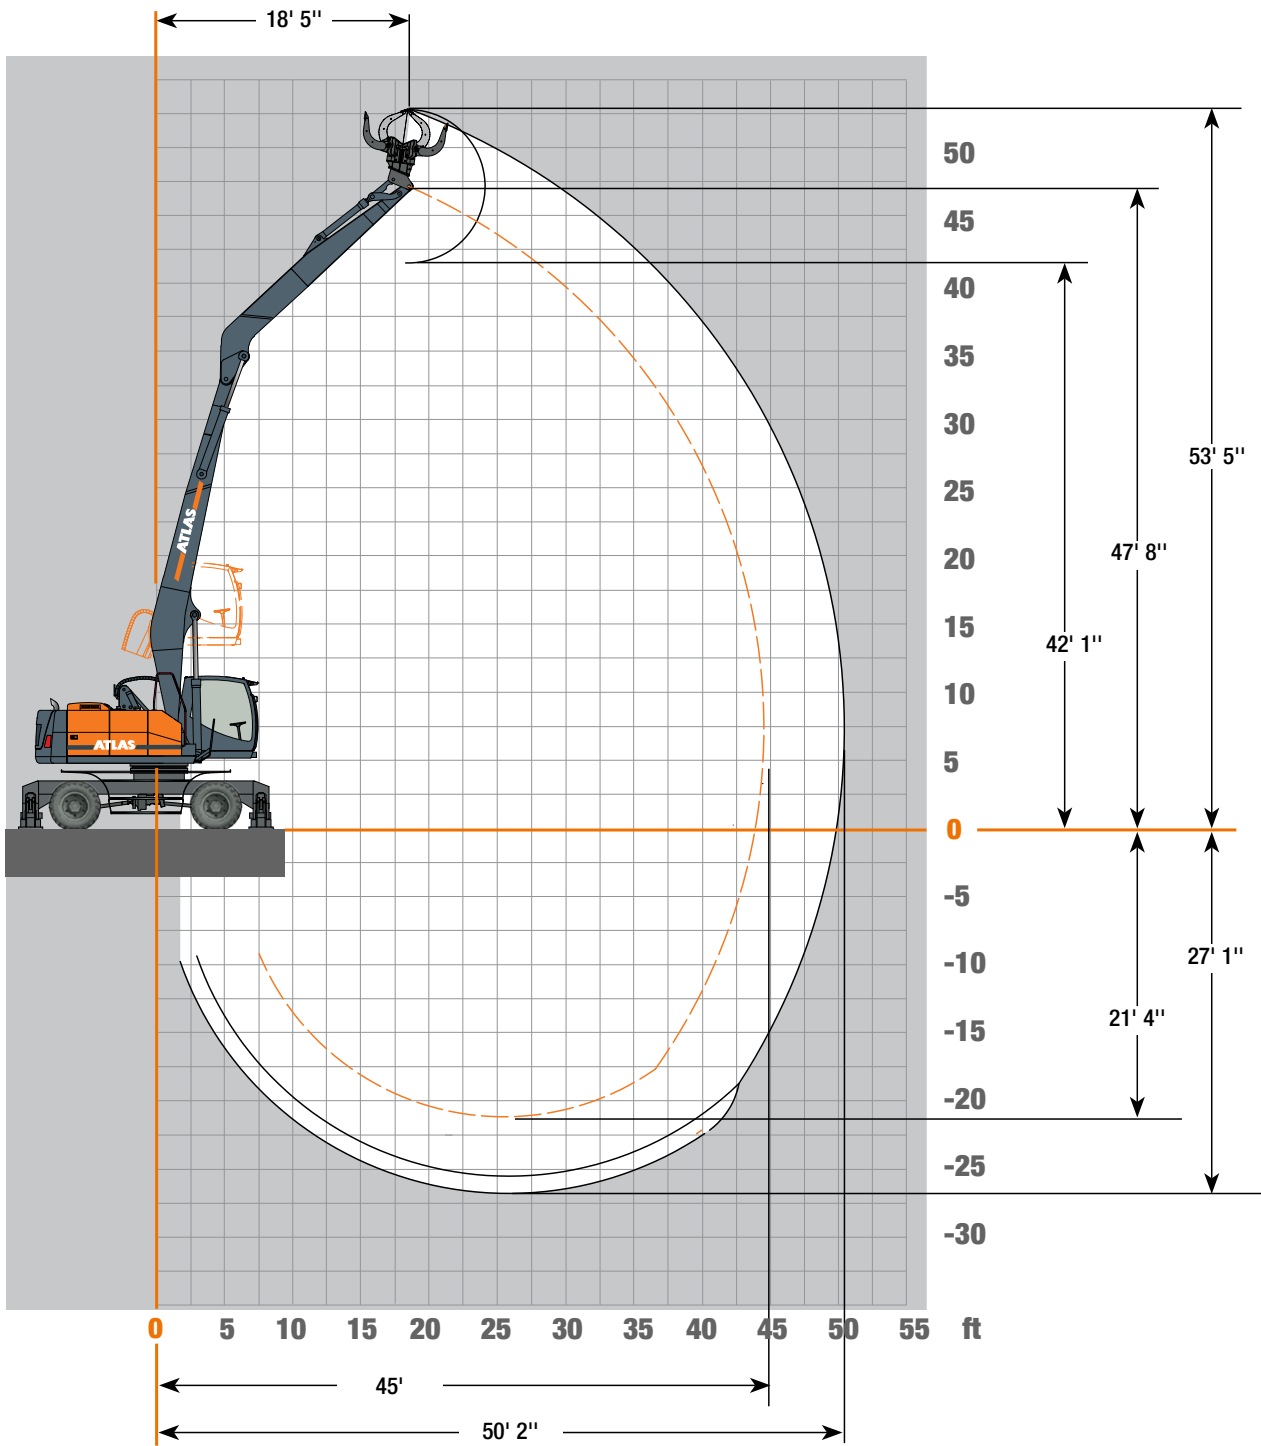


Attachments




Load hook




Log grab



Clamshell grab































Orange peel grab



Load lifting magnet

LIFTING CAPACITIES 300MH

Lifting Capacities Loading boom 26' 3" (C25.6i) and stick 19' 8" (D25.16is). Max reach 50' 2"

HEIGHT	Undercarriage position		14' 9"	18' 1"	21' 4"	24' 7"	27' 1"	31' 2"	34' 5"	37' 9"	41'	44' 3"	
44' 3"	FRONT 	outriggers down			10 531	7 154							
		outriggers up			10 531	7 154							
	LATERAL 	outriggers down			10 531	7 154							
		outriggers up			10 531	7 154							
39' 4"	FRONT 	outriggers down				12 630	9 804						
		outriggers up				12 630	9 804						
	LATERAL 	outriggers down				10 492*	8 309*						
		outriggers up				12 630	9 804						
34' 5"	FRONT 	outriggers down				13 527	12 818	11 100	7 507				
		outriggers up				13 527	12 818	11 100	7 507				
	LATERAL 	outriggers down				10 485*	8 552*	6 918*	5 613*				
		outriggers up				13 527	12 818	11 100	7 507				
29' 6"	FRONT 	outriggers down				13 649	12 767	12 086	11 440	7 535			
		outriggers up				13 649	12 767	11 521*	9 601*	7 535			
	LATERAL 	outriggers down				10 593*	8 413*	6 936*	5 668*	4 650*			
		outriggers up				13 649	12 767	12 086	11 180*	7 535			
24' 7"	FRONT 	outriggers down				14 120	13 078	12 277	11 488	10 860	6 254		
		outriggers up				14 120	13 078	11 334*	9 431*	8 078*	6 254		
	LATERAL 	outriggers down				10 229*	8 170*	6 768*	5 531*	4 632*	3 816*		
		outriggers up				14 120	13 078	12 277	10 999*	9 462*	6 254		
19' 8"	FRONT 	outriggers down			16 519	14 987	13 695	12 650	11 757	10 968	9 376		
		outriggers up			16 519	14 987	13 287*	10 990*	9 281*	7 930*	6 823*		
	LATERAL 	outriggers down			12 390*	9 749*	7 899*	6 464*	5 375*	4 497*	3 765*		
		outriggers up			16 519	14 987	13 695	12 650	10 853*	9 312*	8 053*		
14' 9"	FRONT 	outriggers down	25 057	20 964	18 064	16 025	14 429	13 159	12 077	10 972*	9 546*	5 562	
		outriggers up	25 057	20 964	18 064	15 452*	12 690*	10 617*	8 986*	7 729*	6 671*	5 562	
	LATERAL 	outriggers down	20 408*	14 742*	11 318*	8 984*	7 370*	6 113*	5 099*	4 312*	3 627*	3 047*	
		outriggers up	25 057	20 964	18 064	16 025	14 429	12 436*	10 553*	9 109*	7 897*	5 562	
9' 10"	FRONT 	outriggers down	29 416	23 483	19 826	17 154	15 146	13 629	12 361	10 670*	9 341*	7 286	
		outriggers up	29 416	23 483	18 322*	14 632*	12 013*	10 152*	8 673*	7 447*	6 479*	5 717*	
	LATERAL 	outriggers down	17 392*	12 915*	10 196*	8 236*	6 773*	5 690*	4 806*	4 056*	3 457*	2 974*	
		outriggers up	29 416	23 483	19 826	17 154	14 143*	11 958*	10 234*	8 818*	7 701*	6 823*	
4' 11"	FRONT 	outriggers down	31 757	25 421	20 972	17 895	15 732	13 900*	11 975*	10 408*	9 189*	7 498	
		outriggers up	30 077*	21 993*	16 936*	13 677*	11 444*	9 647*	8 307*	7 200*	6 327*	5 584*	
	LATERAL 	outriggers down	14 564*	11 351*	9 045*	7 418*	6 241*	5 240*	4 480*	3 832*	3 307*	2 857*	
		outriggers up	31 757	25 421	20 216*	16 250*	13 569*	11 440*	9 861*	8 565*	7 546*	6 684*	
0	FRONT 	outriggers down	31 431	25 509	21 323	18 128	15 774	13 536*	11 618*	10 221*	9 041*	6 978	
		outriggers up	28 186*	20 507*	16 069*	12 981*	10 869*	9 292*	7 983*	7 011*	6 186*	5 529*	
	LATERAL 	outriggers down	13 089*	10 157*	8 258*	6 792*	5 736*	4 907*	4 193*	3 646*	3 175*	2 798*	
		outriggers up	31 431	24 941*	19 339*	15 538*	12 974*	11 083*	9 524*	8 375*	7 403*	6 634*	
-4' 11"	FRONT 	outriggers down	29 092	24 248	20 507	17 531	15 329	13 241*	11 400*	10 031*	8 944*		
		outriggers up	27 630*	19 874*	15 417*	12 485*	10 531*	9 012*	7 776*	6 841*	6 094*		
	LATERAL 	outriggers down	12 582*	9 612*	7 721*	6 371*	5 421*	4 650*	4 001*	3 499*	3 091*		
		outriggers up	29 092	24 248	18 651*	15 018*	12 632*	10 796*	9 310*	8 199*	7 308*		
-9' 10"	FRONT 	outriggers down	25 271	21 557	18 739	16 202	14 134	12 359	10 741	9 248	7 566		
		outriggers up	25 271	19 495*	15 181*	12 355*	10 326*	8 816*	7 676*	6 799*	6 096*		
	LATERAL 	outriggers down	12 493*	9 361*	7 507*	6 213*	5 240*	4 491*	3 907*	3 452*	3 089*		
		outriggers up	25 271	21 557	18 408*	14 905*	12 419*	10 586*	9 213*	8 159*	7 313*		
-14' 9"	FRONT 	outriggers down	20 302	17 859	15 752	13 942	12 059	10 492	8 902	7 229			
		outriggers up	20 302	17 859	15 082*	12 330*	10 271*	8 799*	7 696*	6 870*			
	LATERAL 	outriggers down	12 762*	9 438*	7 467*	6 195*	5 203*	4 475*	3 922*	3 512*			
		outriggers up	20 302	17 859	15 752	13 942	12 059	10 492	8 902	7 229			
-19' 8"	FRONT 	outriggers down		13 069	11 790	10 432	9 063	7 588	5 930				
		outriggers up		13 069	11 790	10 432	9 063	7 588	5 930				
	LATERAL 	outriggers down		9 749*	7 672*	6 307*	5 366*	4 623*	4 118*				
		outriggers up		13 069	11 790	10 432	9 063	7 588	5 930				


The specified max. loading capacities in pounds (lbs) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values.

*Value limited due to excavator stability.


DIMENSION 300MH

300MH Transport position


Standard-Cab

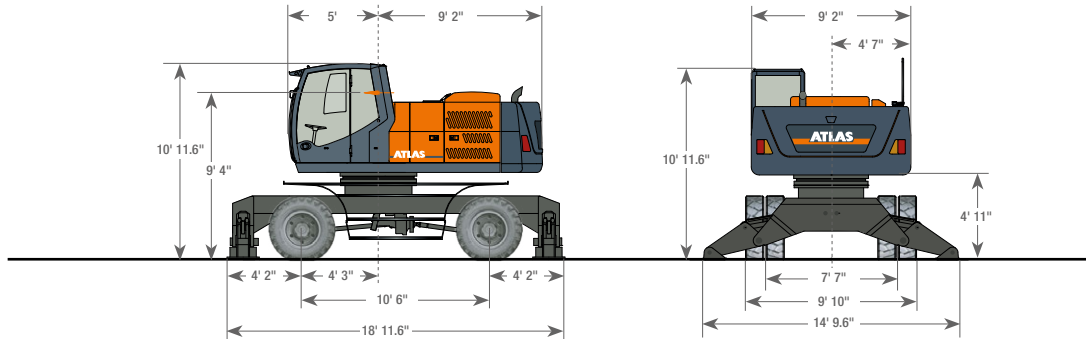

Lift-Cab

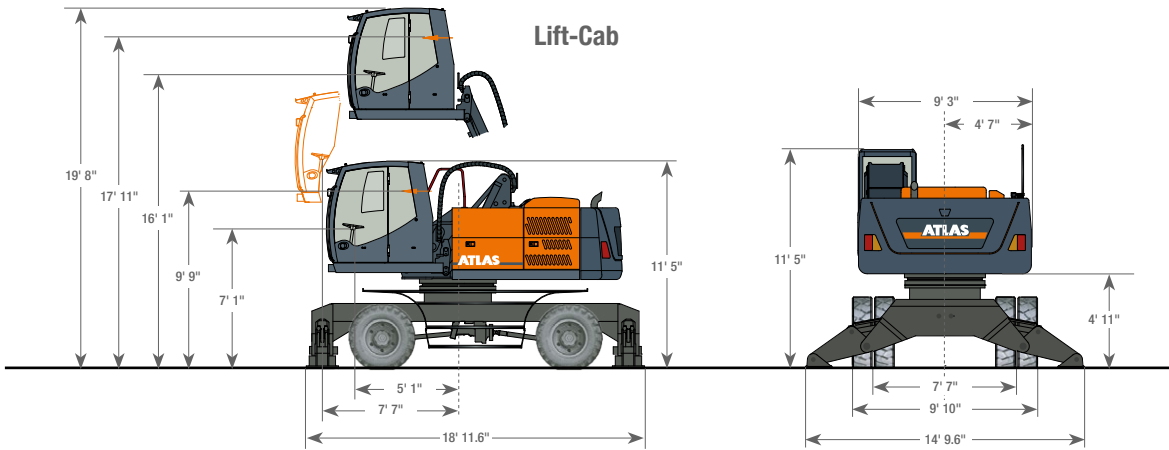


Basic Lift

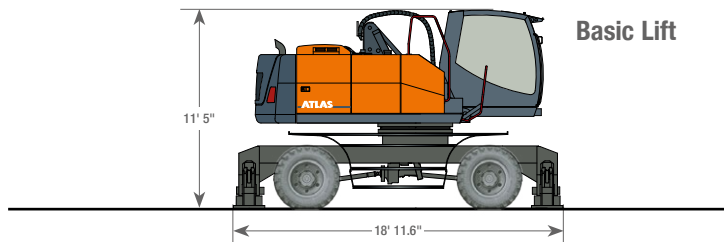

Cab elevation 4'

A84.32 Lift C25.6I, D25.16I

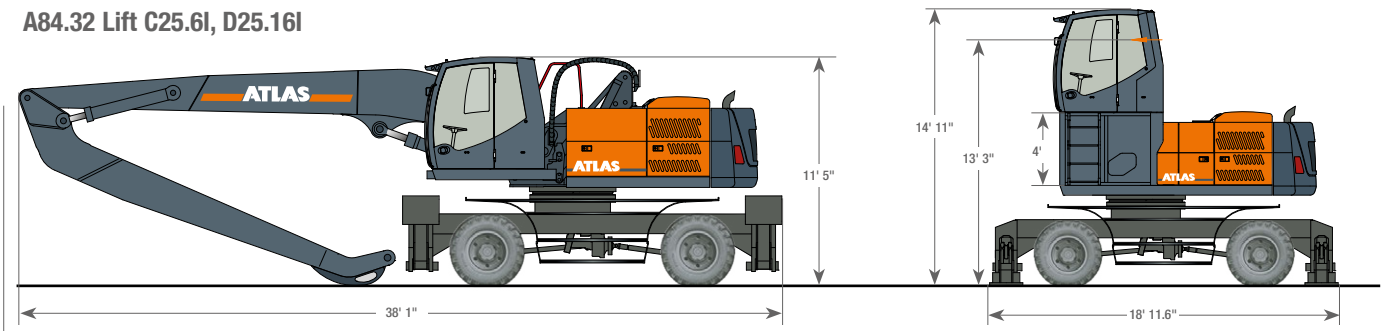

Further variations of cabs on request



300MH-US (1) Effective date: 11/2022. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Atlas makes no other warranty, express or implied. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Atlas makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Atlas GmbH and/or its subsidiaries. All rights are reserved. Atlas® is a registered trademark of Atlas GmbH. Copyright © 2022 Atlas GmbH. Ref. no. 6214261

GANDERKESEE FACTORY

Atlas GmbH
Atlasstraße 6
D-27777 Ganderkesee,
Germany

Tel.: +49 (0) 4222 954 0
Fax: +49 (0) 4222 954 220
E-mail: info@atlasgmbh.com
www.atlasgmbh.com



VECHTA FACTORY

Atlas GmbH
Theodor-Heuss-Str. 3
D-49377 Vechta
Germany

T: +49 (0) 4441 954 0
F: +49 (0) 4441 954 299
E-mail: info@atlasgmbh.com
www.atlasgmbh.com



DELMENHORST FACTORY

Atlas GmbH
Stedinger Straße 324
D-27751 Delmenhorst
Germany

T: +49 (0) 4221 49 10
F: +49 (0) 4221 49 14 43
E-mail: info@atlasgmbh.com
www.atlasgmbh.com

ATLAS CRANES UK LTD NATIONAL SALES & SERVICE FACILITY

Wharfedale Road,
Euroway Trading Est.
Bradford, England BD4 6SL
United Kingdom

T: +44 8444 99 66 88
F: +44 1274 65 37 85
E-mail: atlasuk@atlasgmbh.com
www.atlas-cranes.co.uk
www.atlasgmbh.com



SINCE 1919
ATLAS

